



HITACHI

SERVICE MANUAL

YK**No.0377E****CT7896B****NTSC****G9LXU Chassis****R/C:CLU-611PR**

CONTENTS

TECHNICAL SPECIFICATIONS	1
SAFETY PRECAUTIONS	2
PRODUCT SAFETY NOTICE	3
TECHNICAL CAUTIONS	3
WIRING DIAGRAM	4
BASIC CIRCUIT DIAGRAM	5
PRINTED WIRING BOARD	9
REPLACEMENT PARTS LIST	12

CAUTION: Before servicing this chassis, it is important that the service technician read the "Safety Precaution" and "Product Safety Notices" in this Service Manual.

TECHNICAL SPECIFICATIONS

ANTENNA INPUT IMPEDANCE	75Ω(300Ω)	POWER INPUT	AC120V, 60Hz
CHANNEL COVERAGE		POWER RATING	150W
VHF BAND	2~13	CONVERGENCE	Self convergence
UHF BAND	14~69	FOCUS	Electrostatic
CATV MID BAND	A-5~A-1	PICTURE TUBE	M68JUA98X or M68 JUA20X
A~I		SPEAKER	2 Woofers (60 x 120 mm)
SUPER BAND	J~W	2 Tweeters (φ 50 mm)	
HYPER BAND	W+1~W+28	SOUND OUTPUT	7W x 2
ULTRA BAND	W+29~W+84	DIMENSIONS	
RECEIVING CHANNEL	181 ch	W	664 mm
CHANNEL INDICATOR	DIGITAL/ON SCREEN	H	595 mm
INTERMEDIATE FREQUENCY		D	518 mm
Picture I-F Carrier	45.75 MHz	WEIGHT	41.0 kg
Sound I-F Carrier	41.25 MHz		
Sound I-F	4.50 MHz		

SPECIFICATIONS AND PARTS ARE SUBJECT TO CHANGE FOR IMPROVEMENT

SOLID STATE COLOUR TELEVISION

September 1990**YOKOHAMA WORKS**

SAFETY PRECAUTIONS

NOTICE: Comply with all cautions and safety related notes located on or inside the cabinet and on the chassis or picture tube.

WARNING: Since the chassis of this receiver is connected to one side of the AC power supply during operation, whenever the receiver is plugged in, service should not be attempted by anyone unfamiliar with the precautions necessary when working on this type of receiver.

The following precautions should be observed:

1. Do not install, remove, or handle the picture tube in any manner unless shatterproof goggles are worn. People not so equipped should be kept away while picture tubes are handled. Keep picture tube away from the body while handling.
2. When service is required, an isolation transformer should be inserted between power line and the receiver before any service is performed on a "HOT" chassis receiver.
3. When replacing a chassis in the receiver, all the protective devices must be put back in place, such as barriers, non-metallic knobs, adjustment and compartment cover-shields, isolation resistors-capacitors, etc.
4. When service is required, observe the original lead dress. Extra care should be taken to assure correct lead dress in the high voltage circuitry area.
5. Always use the manufacturer's replacement components. Especially critical components as indicated on the circuit diagram should not be replaced by other manufacturer's. Furthermore where a short circuit has occurred, replace those components that indicate evidence of overheating.
6. Before returning a serviced receiver to the customer, the service technician must thoroughly test the unit to be certain that it is completely safe to operate without danger of electrical shock, and be sure that no protective device built into the receiver by the manufacturer has become defective, or inadvertently defeated during servicing.


Therefore, the following checks should be performed for the continued protection of the customer and service technician.

Leakage Current Cold Check

With the AC plug removed from the 120V AC 60Hz source, place a jumper across the two plug prongs. Turn the AC power switch on. Using an insulation tester (DC500V), connect one lead to the jumpered AC plug and touch the other lead to each exposed metal part (antennas, screwheads, metal overlays, control shafts, etc.), particularly any exposed metal part having a return path to the chassis. Exposed metal parts having a return path to the chassis should have a minimum resistor reading of $0.24M\Omega$ and a maximum resistor reading of $5.2M\Omega$. Any resistance value below or above this range indicates an abnormality which requires corrective action. Exposed metal parts not having a return path to the chassis will indicate an open circuit.

Leakage Current Hot Check

Plug the AC line cord directly into a AC 120V 60Hz outlet (do not use an isolation transformer for this check). Turn the AC power switch on. Using a "leakage Current Tester (Simpson Model 229 or equivalent)", measure for current from all exposed metal parts of the cabinet (antennas, screwheads, metal overlays, control shafts, etc.), particularly any exposed metal part having a return path to the chassis, to a known earth ground (water pipe, conduit, etc.). Any current measured must not exceed 0.5mA.

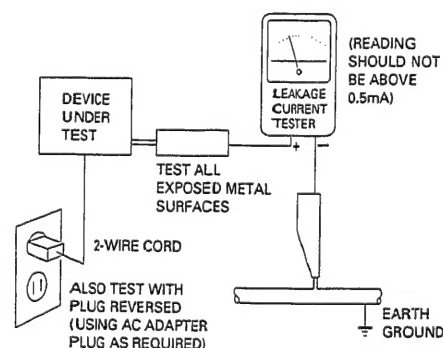

AC Leakage Test

ANY MEASUREMENTS NOT WITHIN THE LIMITS OUTLINED ABOVE ARE INDICATIVE OF A POTENTIAL SHOCK HAZARD AND MUST BE CORRECTED BEFORE RETURNING THE RECEIVER TO THE CUSTOMER.

High Voltage


This receiver is provided with a hold down circuit for clearly indicating that voltage has increased in excess of a predetermined value. Comply with all notes described in this Service Manual regarding this hold down circuit when servicing, so that this hold down circuit is operated correctly.

Serviceman warning

With minimum Black Level and Picture, the operating high voltage in this receiver is lower than 34.0kV. In case any component having influence on the high voltage is replaced, confirm that high voltage with minimum Black Level and Picture is lower than 34.0kV.

To measure H.V. use a high impedance H.V. meter. Connect (-) to chassis earth and (+) to the CPT anode button (See the following connection diagram).

NOTE: Turn the power switch off without fail before the connection to the Anode button is made.

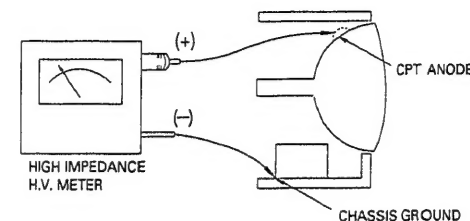

X-radiation

TUBE: The primary source of X radiation in this receiver is the picture tube. The tube utilized in this chassis is specially constructed to limit X radiation emission.


For continued X radiation protection, the replacement tube must be the same type as the original, HITACHI approved type.

When troubleshooting and making test measurements in a receiver with an excessive high voltage problem, avoid coming unnecessarily close to the picture tube and the high voltage component. Do not operate the chassis longer than is necessary to locate the cause of the excessive voltage.

TECHNICAL CAUTIONS


High voltage limiter circuit operation check

1. Connect the high voltage voltmeter between the CPT anode terminal (anode cap) and ground (TP702) as shown in the diagram.
2. Set the AC input voltage to $120 \pm 3V$.
3. Receive the broadcast signal and set the picture level and the black level to maximum. Adjust the screen VR and sub brightness VR so that beam current is $1.35 \pm 0.1mA$. (The voltage at ABL terminal of FBT — between both ends of C747 — should 12V or less at this time.)
4. Check that the constant high voltage is $26.7 \pm 1.0kV$ at this time.
5. Set the AC input voltage to $100 \pm 5V$ and then short-circuit both ends of D601 and connect the jig to the R930.
6. Leave the settings of the picture, black level and screen VRs as in item (3) and gradually increase the AC input voltage. Check that the picture disappears when the high voltage is less than 32.0kV.
7. Turn the switch of the set off immediately after checking that the picture disappears.

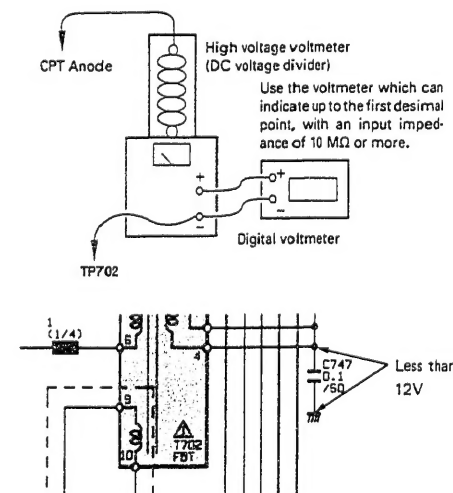

+B voltage operation check

1. Connect the digital voltmeter between the emitter terminal of Q904 and the heat sink of Q901 (GND).
2. Short circuit both ends of C914 and C712.
3. Turning the VR R929 fully counterclockwise/clockwise for +B voltage increasing.
4. Check +B voltage shall be less than 126.2Vdc/136.0Vdc.
5. Remove the shortjumper both ends of C914 and C712.
6. After (3), readjust +B voltage is $126 \pm 0.1Vdc$ when picture and black level is controlled to the maximum.



PRODUCT SAFETY NOTICE


Many electrical and mechanical parts in HITACHI television receiver have special safety related characteristics. These are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in this Service Manual. Electrical components having such features are identified with a Δ mark in the schematics and parts list in this Service Manual.

The use of a substitute replacement component which does not have the same safety characteristics as the HITACHI recommended replacement one, shown in the parts list in this Service Manual, may create shock, fire, X-radiation, or other hazards.

Product Safety is continuously under review and new instructions are issued from time to time. For the latest information, always consult the current HITACHI Service Manual. A subscription to, or additional copies of, HITACHI Service Manual may be obtained at a nominal charge from HITACHI SALES CORPORATION.

CT7896B

WIRING DIADRAM

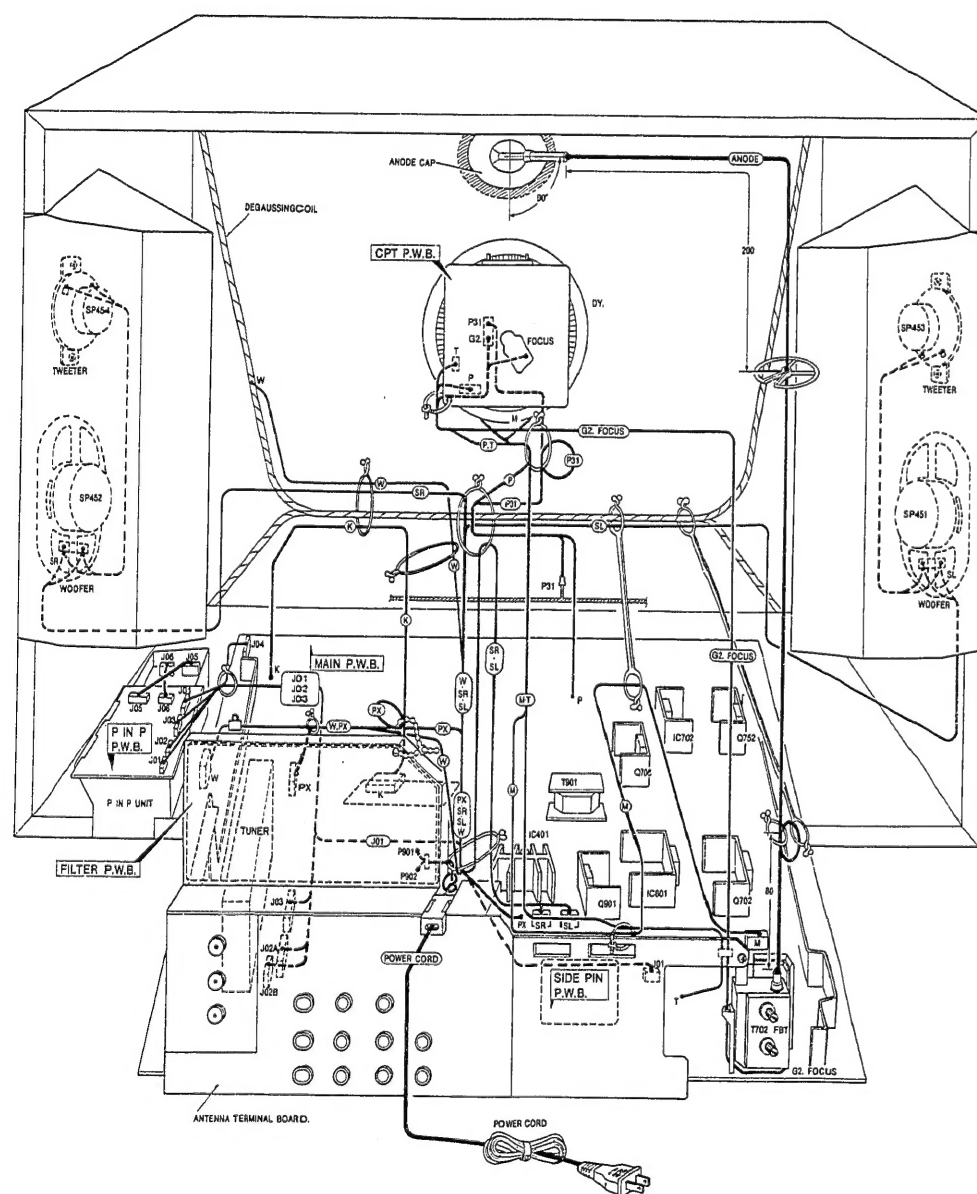


1

2

3

4

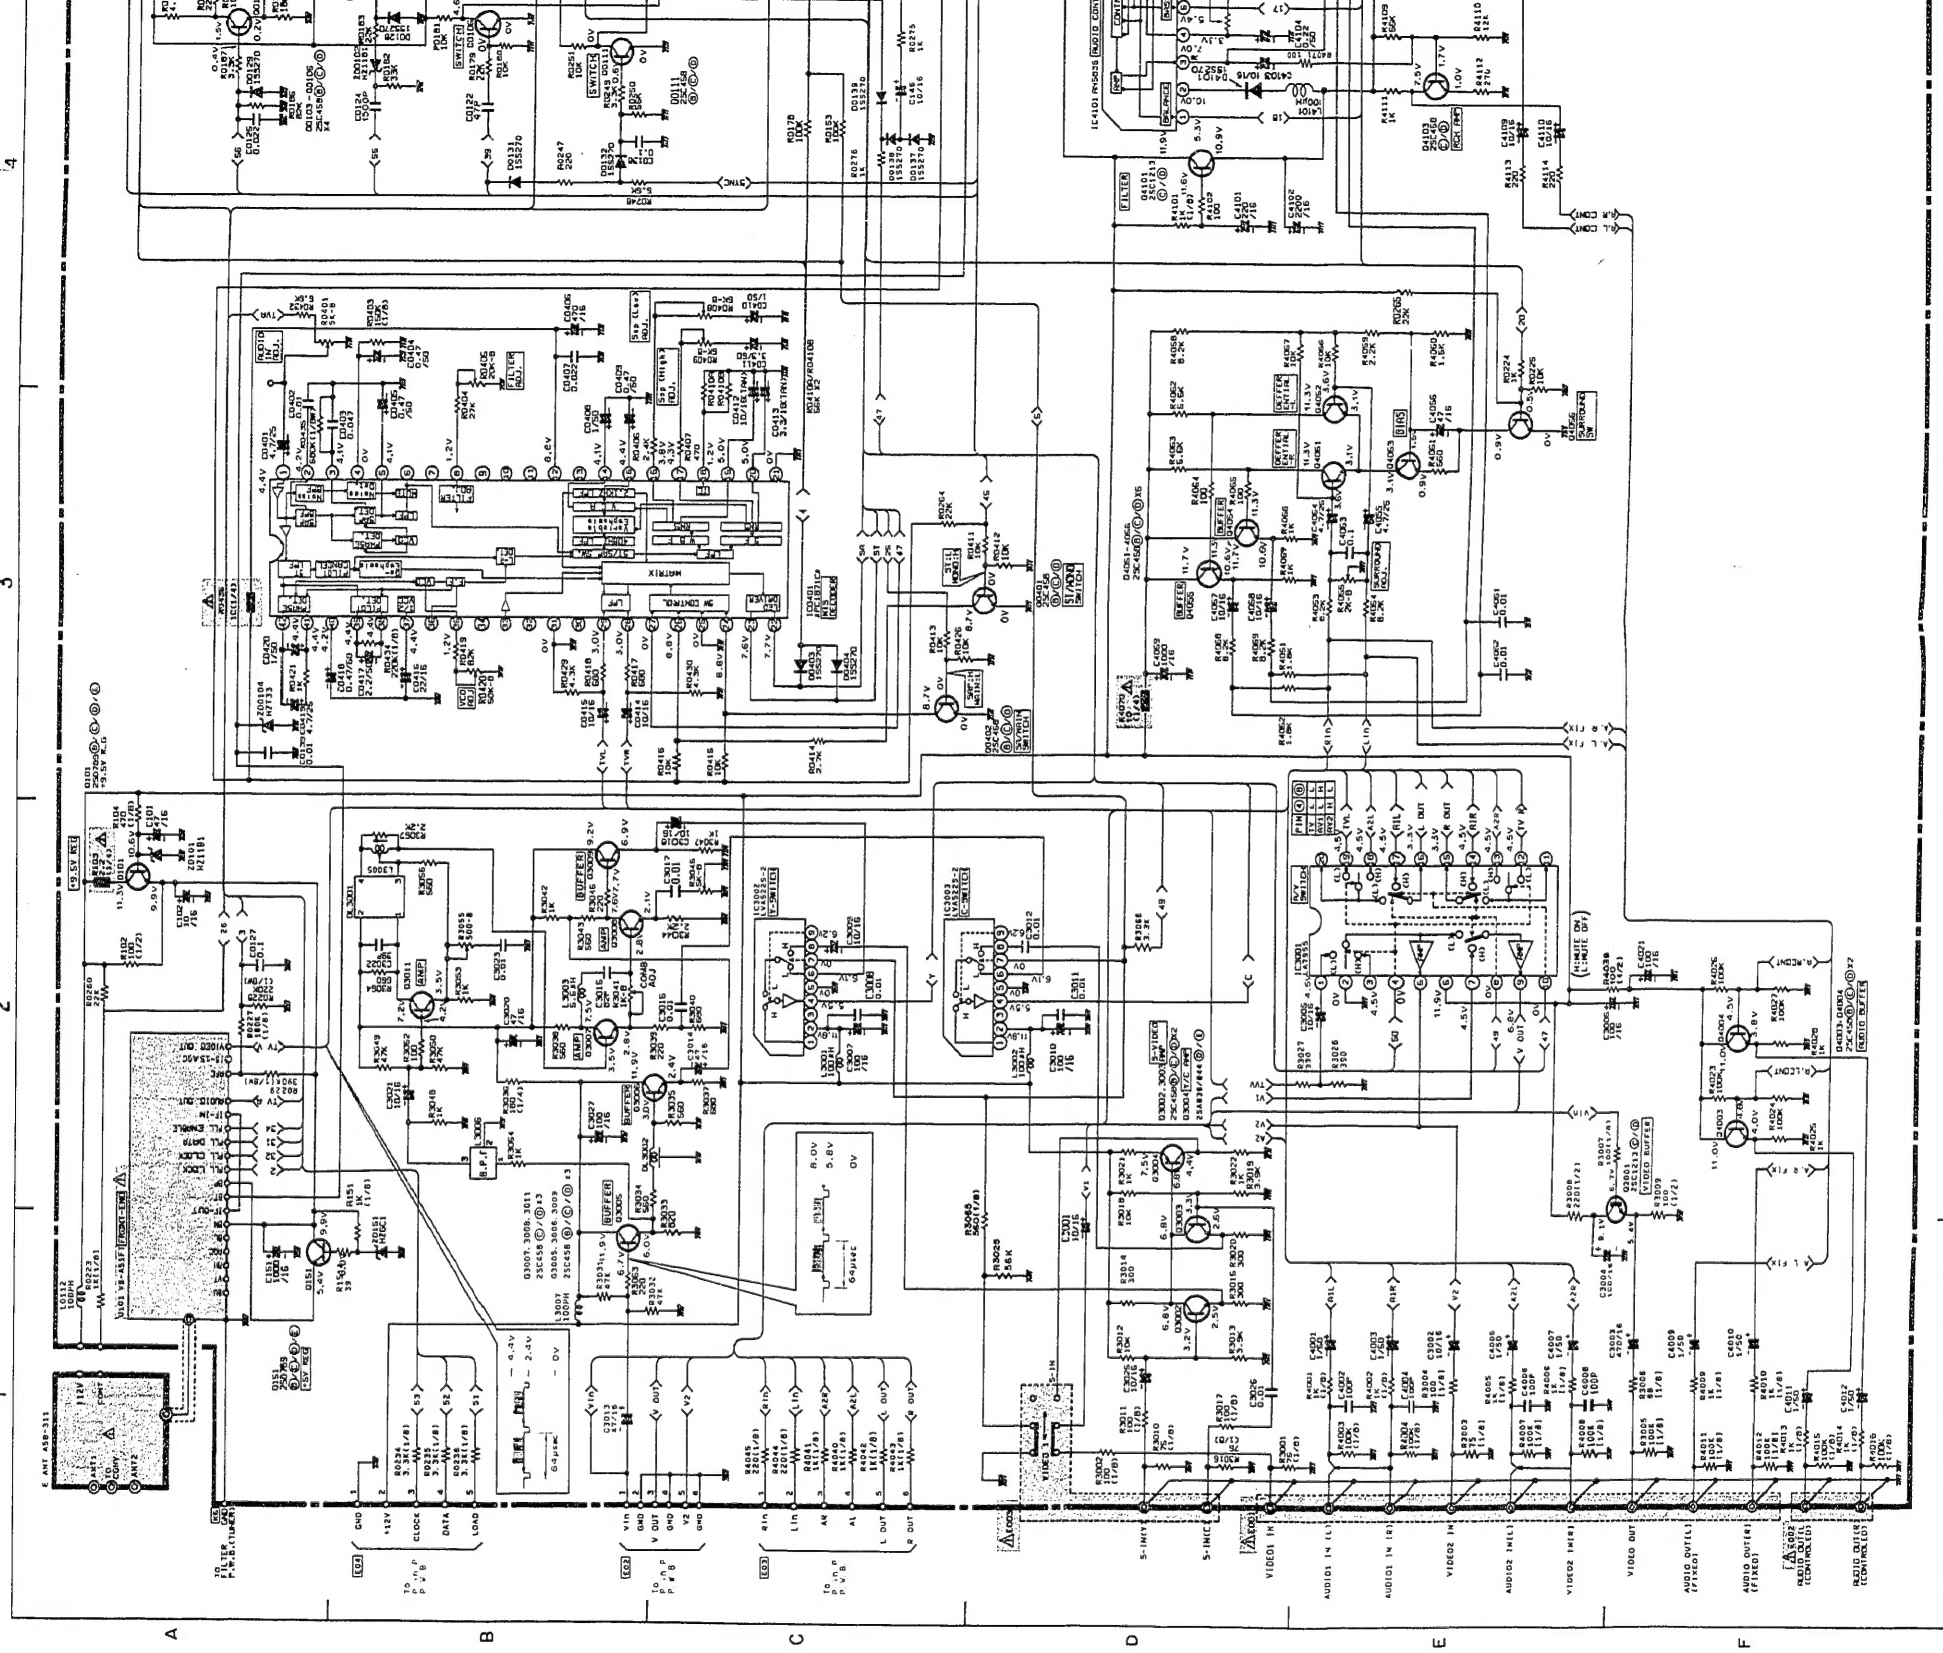


1

2


3

4


PRODUCT SAFETY NOTE: Components marked with a Δ and shaded have special characteristics important to safety. Before replacing any of these components, read carefully the **PRODUCT SAFETY NOTICE** of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

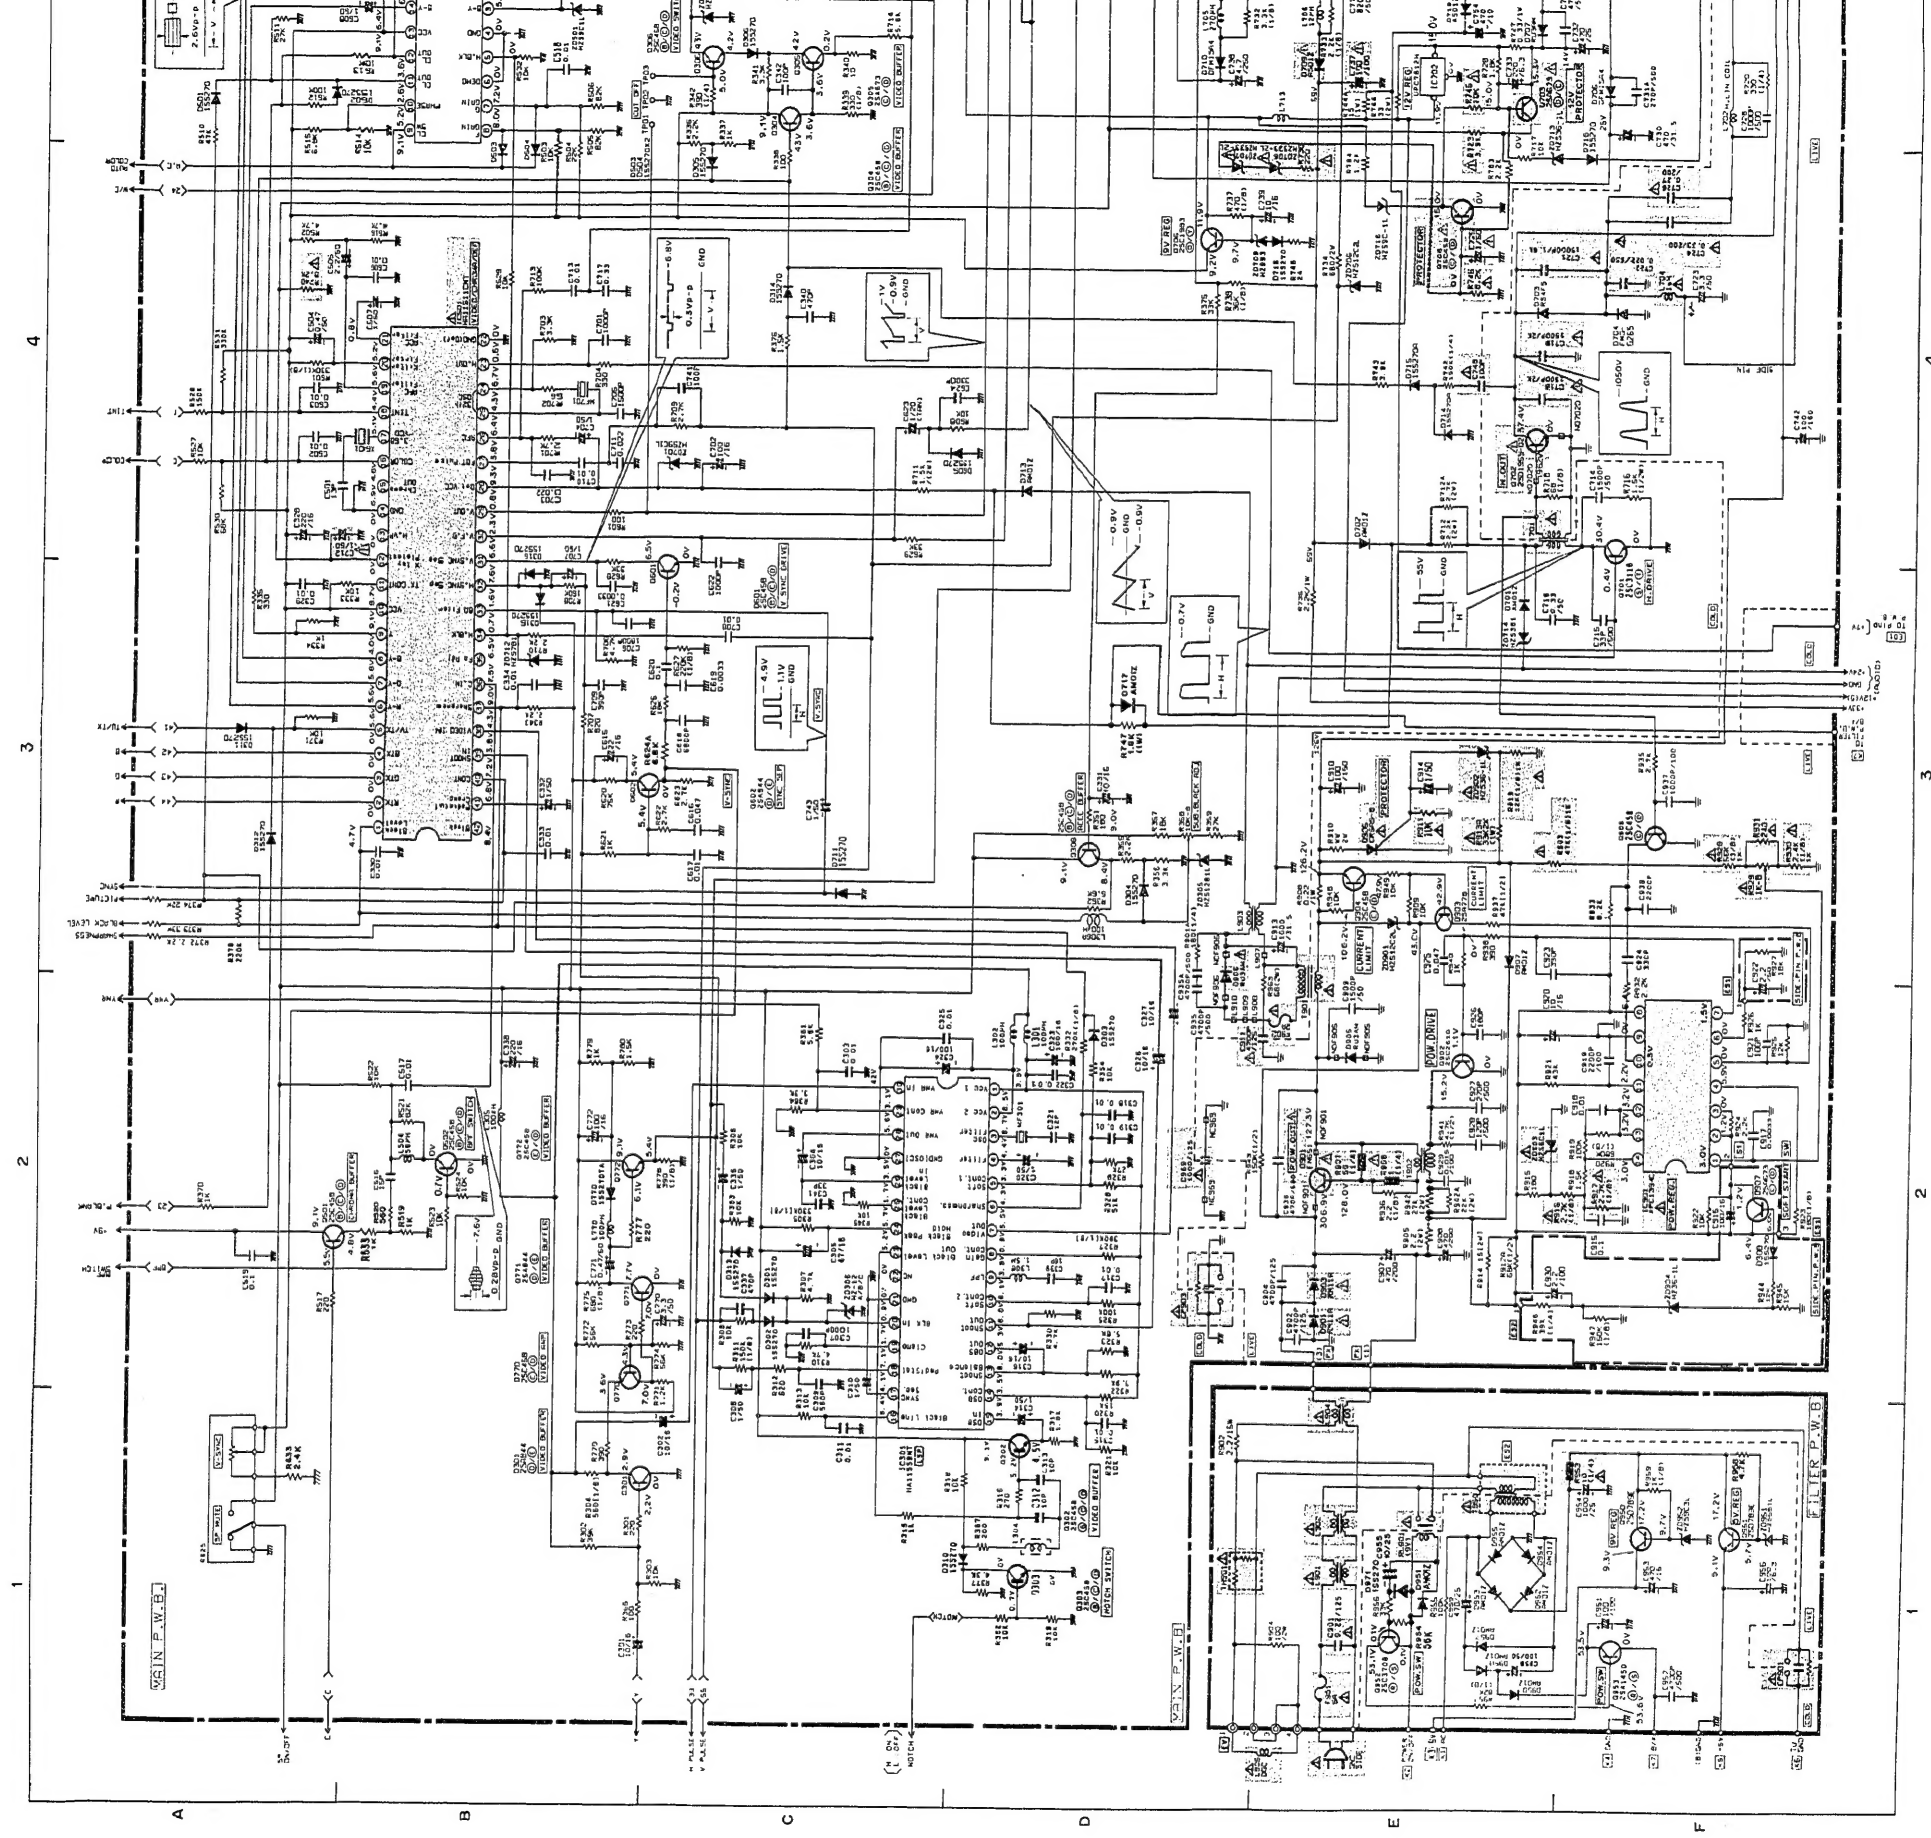

• Since this is a basic circuit diagram, the value of the parts is subject to be altered for improvement.
 • All DC voltage to be measured with a tester (100k Ω /V). Voltage taken on a complex color bar signal including a standard color bar signal.

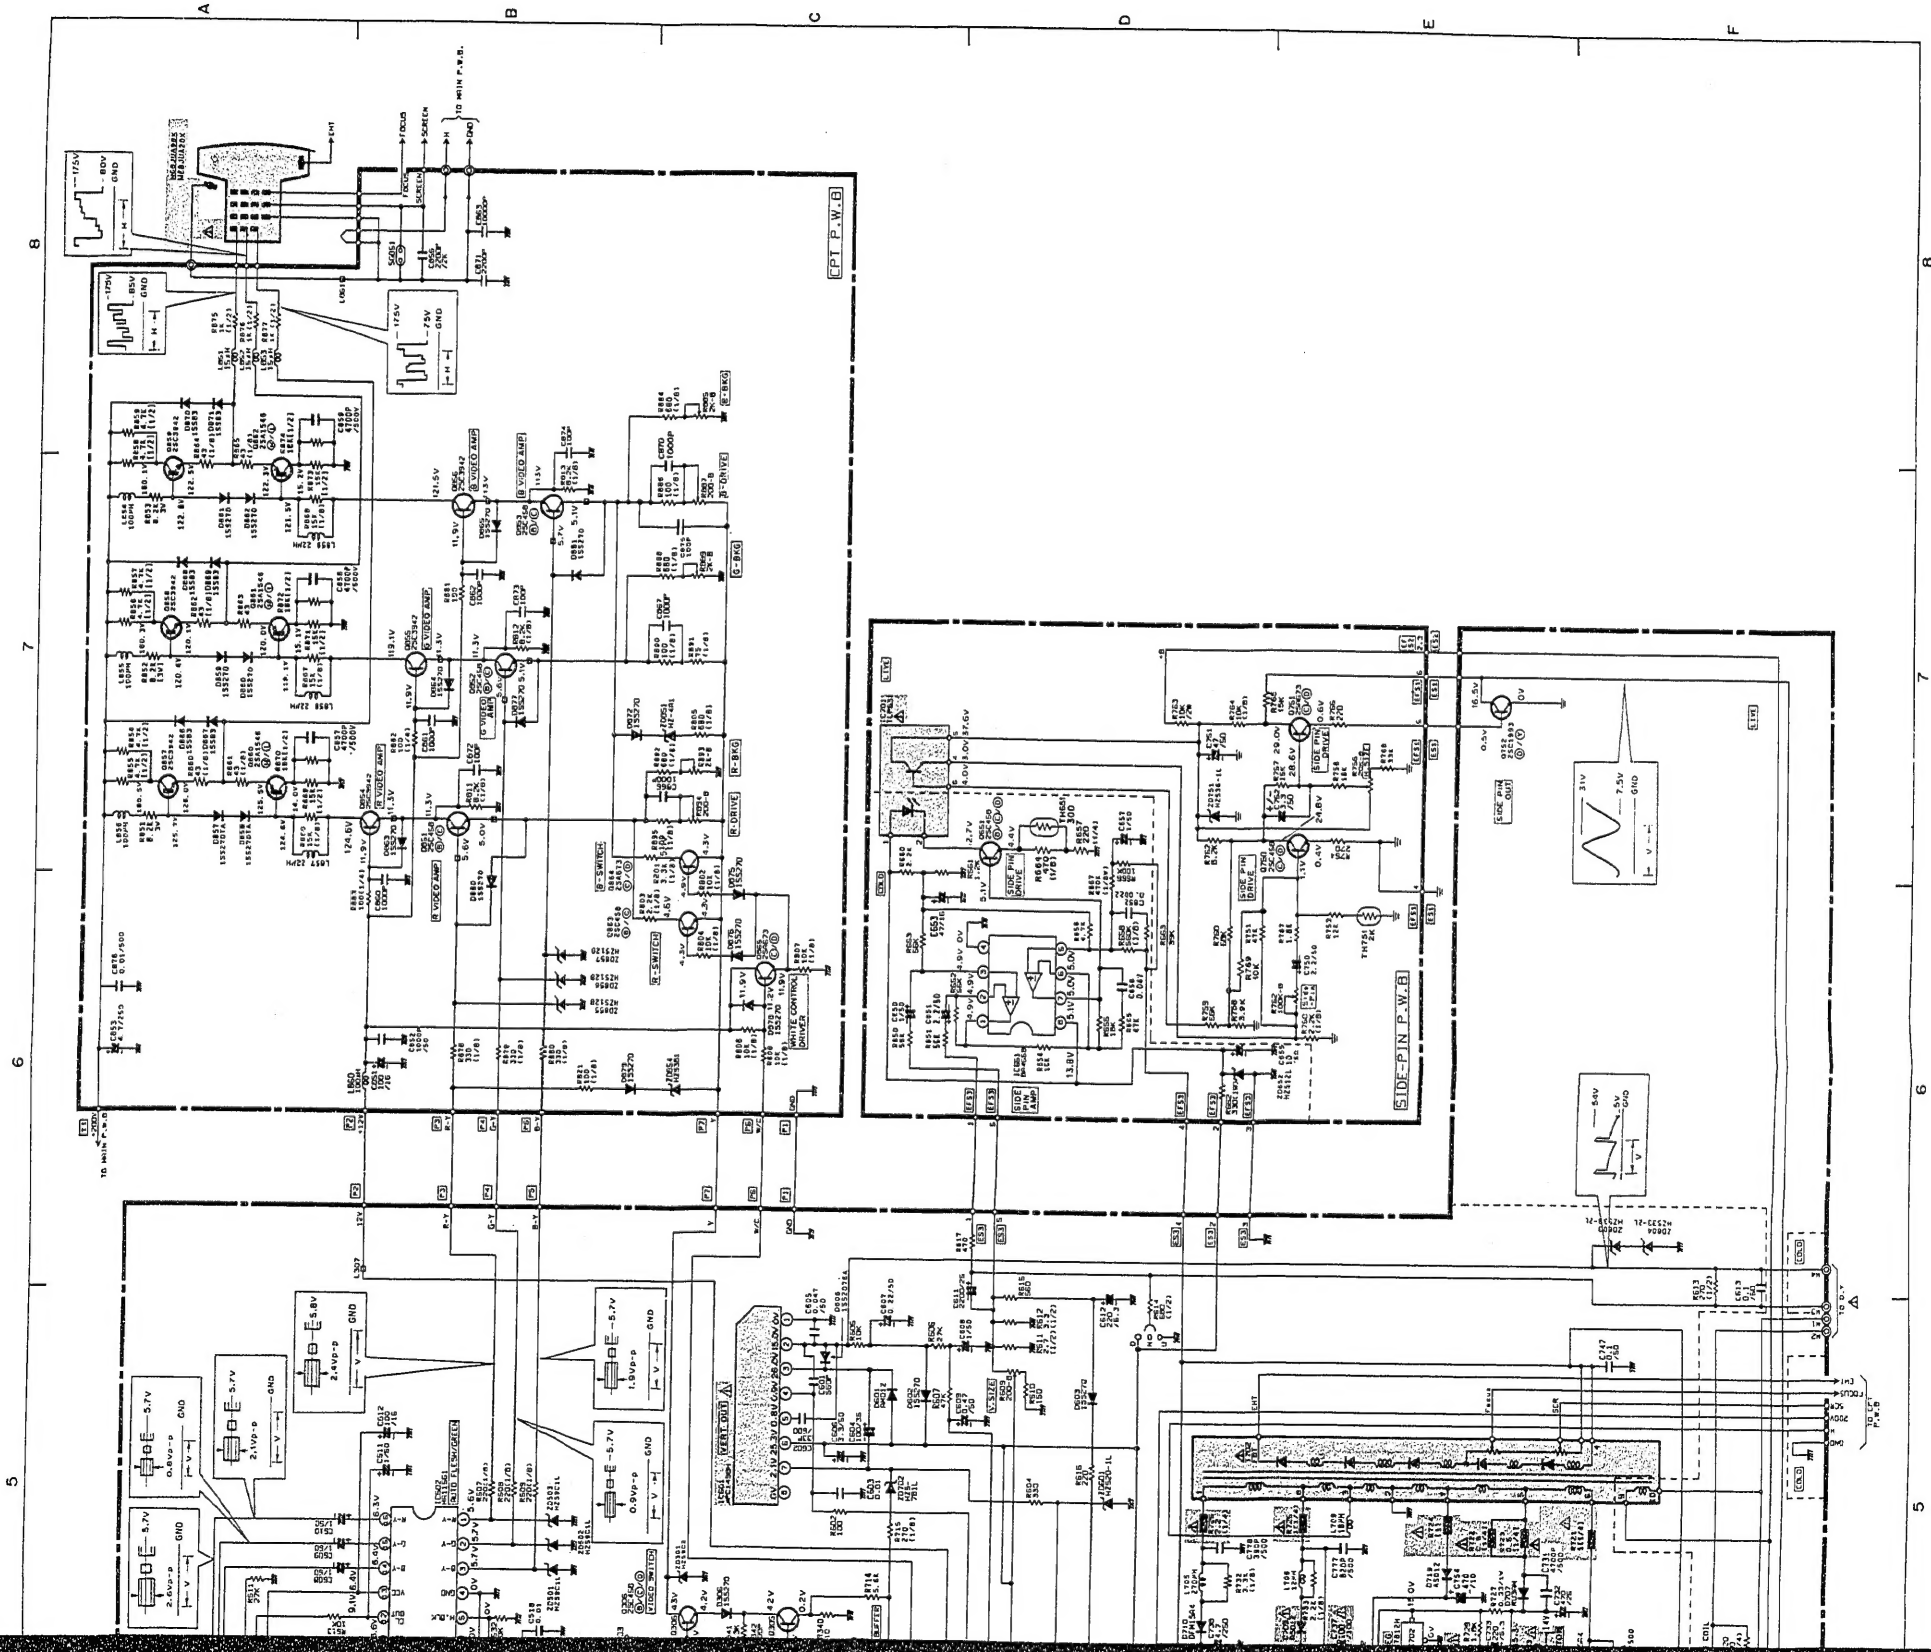

BASIC CIRCUIT DIAGRAM


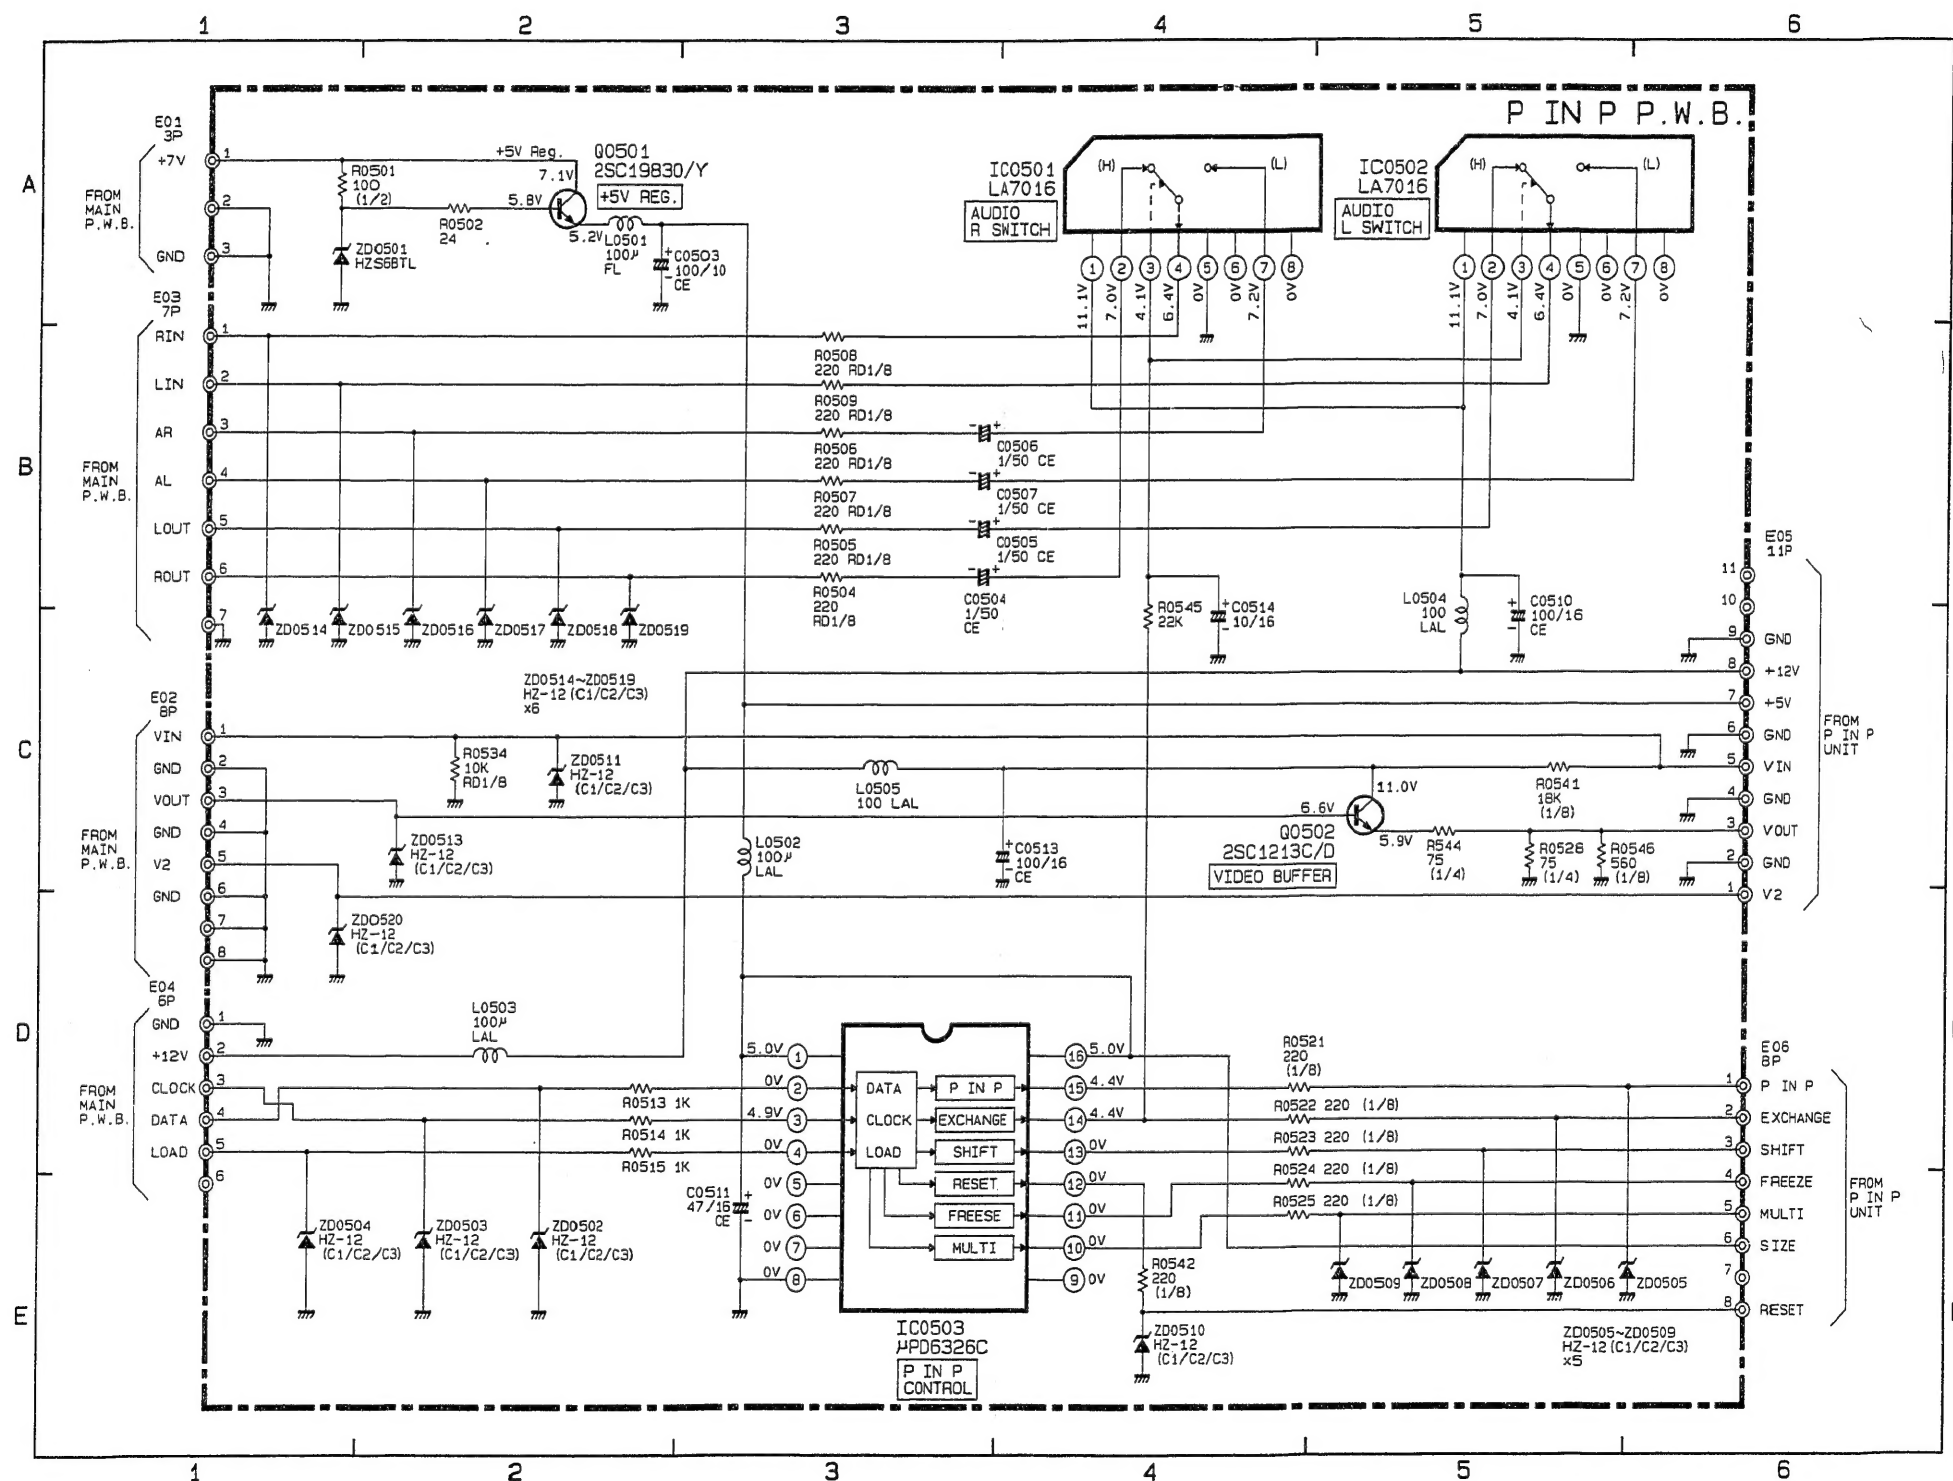


CT7896B


MAIN P.W.B.

PRINTED WIRING BOARD

P in P.W.B.

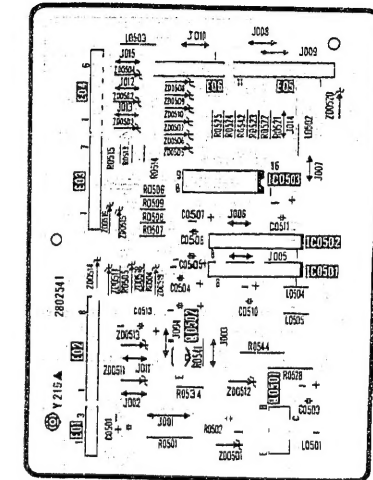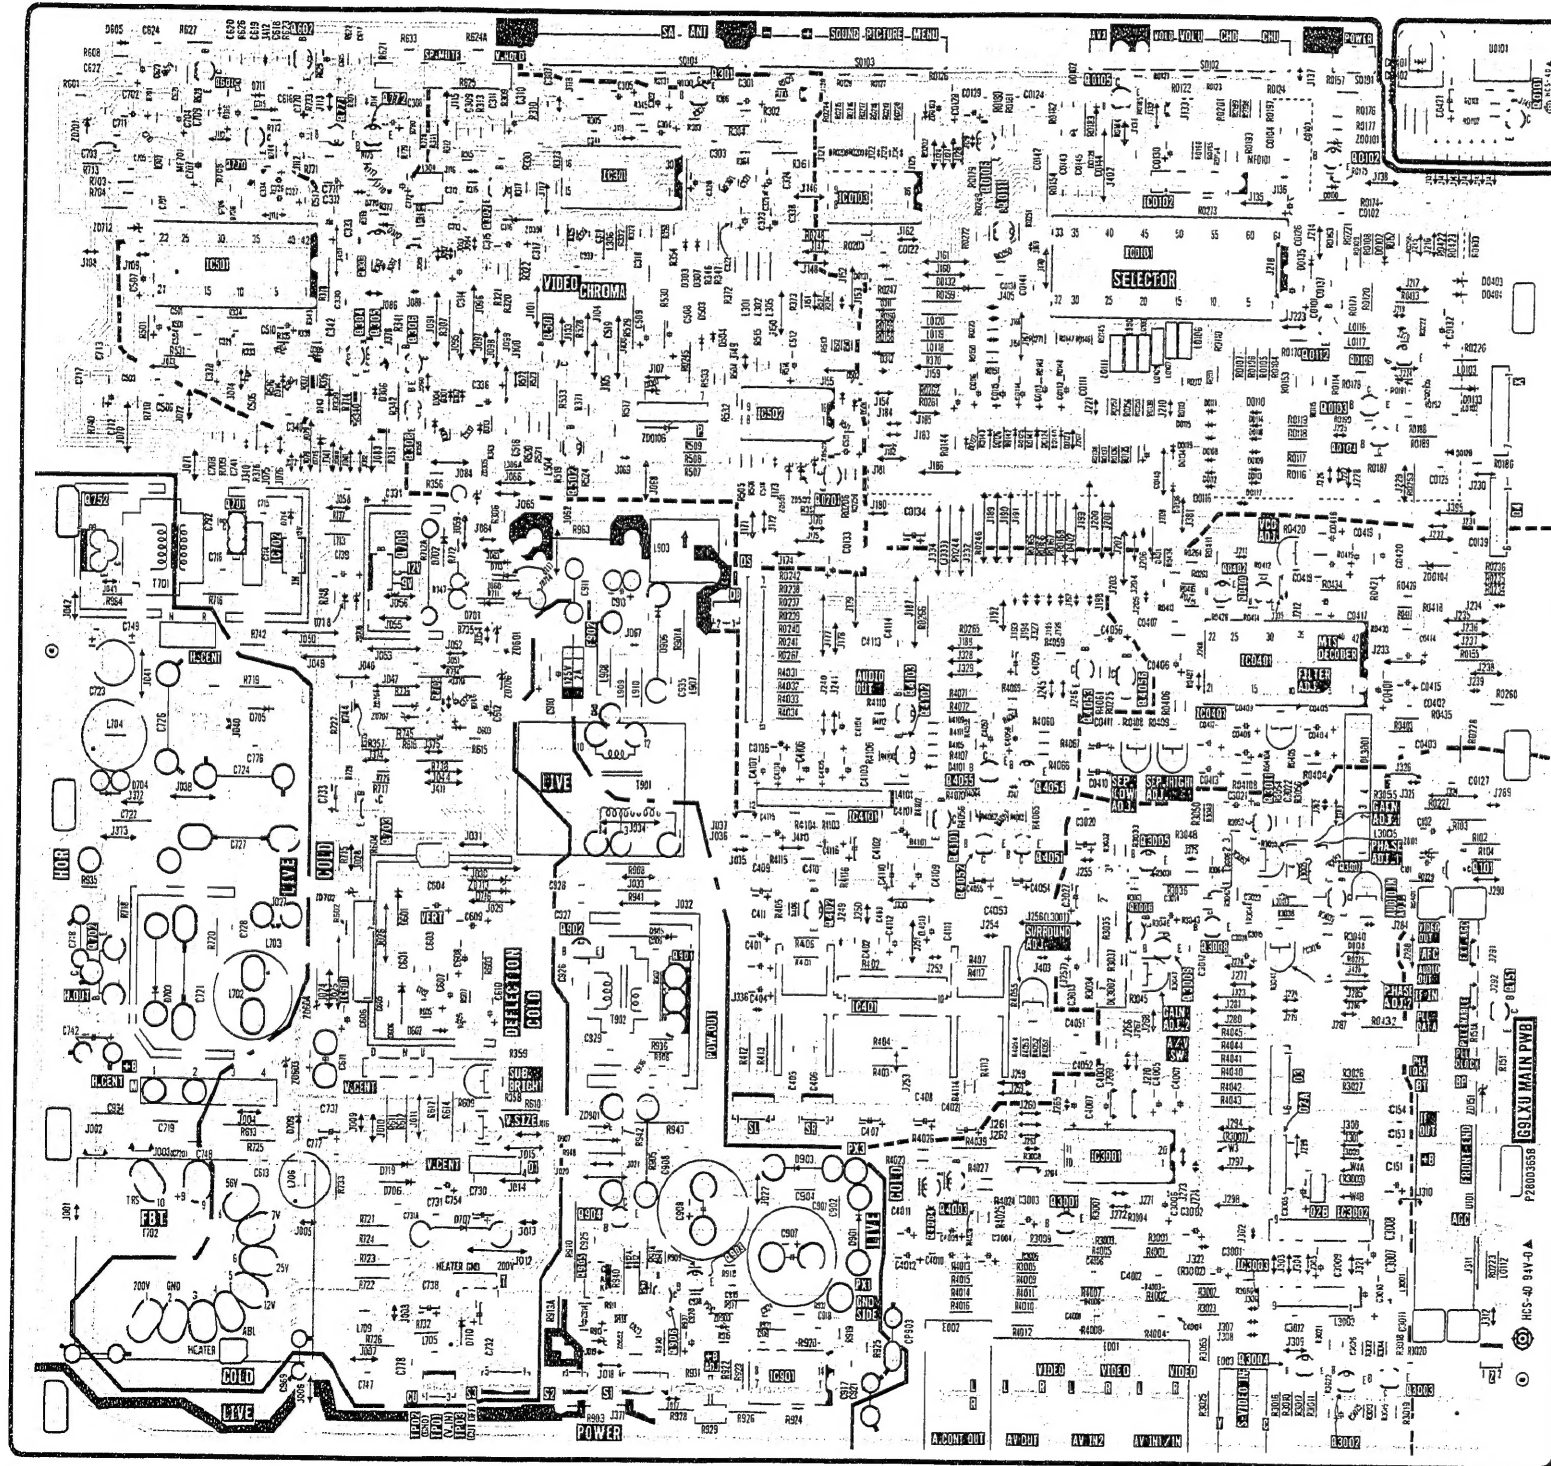


SIDE PIN P.W.B.




CT7896B

PRINTED WIRING BOARD

CPT P.W.B.

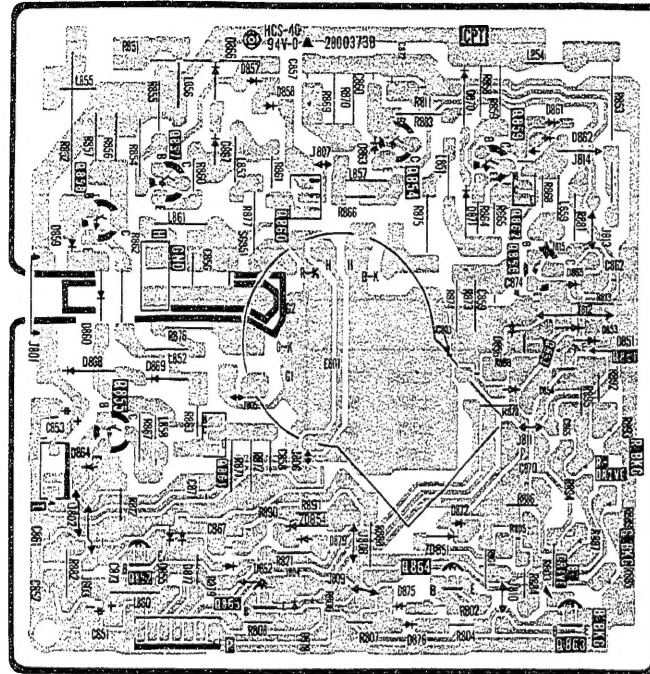

FILTER P.W.B.

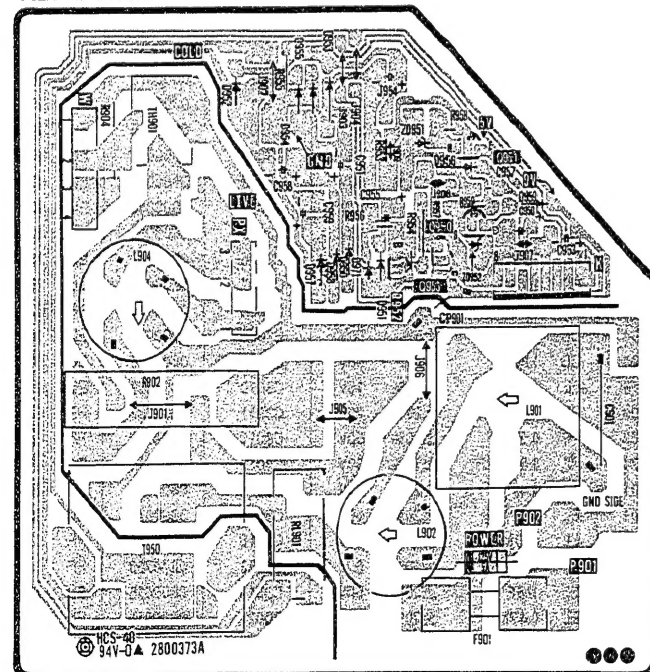

REPLACEMENT PARTS LIST

PRODUCT SAFETY NOTE: Components marked with a Δ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

ABBREVIATIONS: Capacitors:.....CD: Ceramic disk, PF: Polyester film, EL: Electrolytic, PP: Polypropylene, PR: Paper, TA: Tantalum, TM: Trimmer.
Resistors:.....CF: Carbon film, CC: Carbon composition, MF: Metal oxide film, VR: Variable resistor, WW: Wire wound, FR: Fuse resistor, MG: Metal glazed.
Semiconductor:.....TR: Transistor, DI: Diode, ZD: Zener diode, VA: Varistor, TH: Thermistor, IC: IC

SYMBOL NO.	PART NO.	DESCRIPTION	SYMBOL NO.	PART NO.	DESCRIPTION
CAPACITORS			C0412	0292714F	TA 10MF $\pm 10\%$ 16V
C0101	0800048	EL 100MF $\pm 20\%$ 10V	C0413	0292712F	TA 3.3MF $\pm 20\%$ 16V
C0102	0274763	PF 0.01MF $\pm 10\%$ 50V	C0414	0800015	EL 10MF $\pm 20\%$ 16V
C0103	0246452	CD 33PF $\pm 5\%$ 50V	C0415	0800015	EL 10MF $\pm 20\%$ 16V
C0104	0246452	CD 33PF $\pm 5\%$ 50V	C0416	0800023	EL 22MF $\pm 20\%$ 16V
C0111	0800009	EL 4.7MF $\pm 20\%$ 25V	C0417	0800005	EL 2.2MF $\pm 20\%$ 50V
C0113	0800009	EL 4.7MF $\pm 20\%$ 25V	C0418	0800001	EL 0.47MF $\pm 20\%$ 50V
C0114	0800009	EL 4.7MF $\pm 20\%$ 25V	C0419	0800009	EL 4.7MF $\pm 20\%$ 25V
C0115	0800009	EL 4.7MF $\pm 20\%$ 25V	C0420	0800003	EL 1MF $\pm 20\%$ 50V
C0116	0800009	EL 4.7MF $\pm 20\%$ 25V	C0421	0800058	EL 220MF $\pm 20\%$ 16V
C0122	0248676	CD 47PF $\pm 5\%$ 50V	C0503	0800048	EL 100MF $\pm 20\%$ 10V
C0124	0244103	CD 1500PF $\pm 10\%$ 50V	C0504	0800003	EL 1MF $\pm 20\%$ 50V
C0125	0274767	PF 0.022MF $\pm 10\%$ 50V	C0505	0800003	EL 1MF $\pm 20\%$ 50V
C0126	0800003	EL 1MF $\pm 20\%$ 50V	C0506	0800003	EL 1MF $\pm 20\%$ 50V
C0127	0880057	PF 0.1MF $\pm 10\%$ 50V	C0507	0800003	EL 1MF $\pm 20\%$ 50V
C0128	0800049	EL 100MF $\pm 20\%$ 16V	C0510	0800049	EL 100MF $\pm 20\%$ 16V
C0129	0800039	EL 47MF $\pm 20\%$ 10V	C0511	0800039	EL 47MF $\pm 20\%$ 10V
C0130	0800048	EL 100MF $\pm 20\%$ 10V	C0513	0800049	EL 100MF $\pm 20\%$ 16V
C0132	0800057	EL 220MF $\pm 20\%$ 10V	C0514	0800015	EL 10MF $\pm 20\%$ 16V
C0133	0800058	EL 220MF $\pm 20\%$ 16V	C101	0800041	EL 47MF $\pm 20\%$ 16V
C0134	0800058	EL 220MF $\pm 20\%$ 16V	C102	0800015	EL 10MF $\pm 20\%$ 16V
C0136	0800009	EL 4.7MF $\pm 20\%$ 25V	C151	0800082	EL 1000MF $\pm 20\%$ 16V
C0137	0244139	CD 1000PF $\pm 10\%$ 50V	C3001	0800015	EL 10MF $\pm 20\%$ 16V
C0138	0880057	PF 0.1MF $\pm 10\%$ 50V	C3002	0800015	EL 10MF $\pm 20\%$ 16V
C0139	0274763	PF 0.01MF $\pm 10\%$ 50V	C3003	0800074	EL 470MF $\pm 20\%$ 16V
C0140	0800049	EL 100MF $\pm 20\%$ 16V	C3004	0800049	EL 100MF $\pm 20\%$ 16V
C0141	0244139	CD 1000PF $\pm 10\%$ 50V	C3005	0800015	EL 10MF $\pm 20\%$ 16V
C0142	0248684	CD 100PF $\pm 5\%$ 50V	C3006	0800049	EL 100MF $\pm 20\%$ 16V
C0143	0248684	CD 100PF $\pm 5\%$ 50V	C3007	0800049	EL 100MF $\pm 20\%$ 16V
C0144	0248684	CD 100PF $\pm 5\%$ 50V	C3008	0274763	PF 0.01MF $\pm 10\%$ 50V
C0145	0248684	CD 100PF $\pm 5\%$ 50V	C3009	0800015	EL 10MF $\pm 20\%$ 16V
C0146	0800015	EL 10MF $\pm 20\%$ 16V	C301	0800015	EL 10MF $\pm 20\%$ 16V
C0401	0800009	EL 4.7MF $\pm 20\%$ 25V	C3010	0800049	EL 100MF $\pm 20\%$ 16V
C0402	0274763	PF 0.01MF $\pm 10\%$ 50V	C3011	0274763	PF 0.01MF $\pm 10\%$ 50V
C0403	0274771	PF 0.047MF $\pm 10\%$ 50V	C3012	0274763	PF 0.01MF $\pm 10\%$ 50V
C0404	0800001	EL 0.47MF $\pm 20\%$ 50V	C3013	0800041	EL 47MF $\pm 20\%$ 16V
C0405	0800001	EL 0.47MF $\pm 20\%$ 50V	C3014	0800041	EL 47MF $\pm 20\%$ 16V
C0406	0800074	EL 470MF $\pm 20\%$ 16V	C3015	0890073	CD 82PF $\pm 5\%$ 50V
C0407	0274767	PF 0.022MF $\pm 10\%$ 50V	C3016	0274763	PF 0.01MF $\pm 10\%$ 50V
C0408	0800003	EL 1MF $\pm 20\%$ 50V	C3017	0274763	PF 0.01MF $\pm 10\%$ 50V
C0409	0800001	EL 0.47MF $\pm 20\%$ 50V	C3018	0800015	EL 10MF $\pm 20\%$ 16V
C0410	0800003	EL 1MF $\pm 20\%$ 50V	C302	0800015	EL 10MF $\pm 20\%$ 16V
C0411	0800007	EL 3.3MF $\pm 20\%$ 50V	C3020	0800041	EL 47MF $\pm 20\%$ 16V
			C3021	0800015	EL 10MF $\pm 20\%$ 16V

CT7896B

CT7896B

PRODUCT SAFETY NOTE: Components marked with a Δ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	DESCRIPTION	SYMBOL NO.	PART NO.	DESCRIPTION
C3022	0246454	CD 39PF $\pm 5\%$ 50V	C4010	0800003	EL 1MF $\pm 20\%$ 50V
C3023	0274763	PF 0.01MF $\pm 10\%$ 50V	C4011	0800003	EL 1MF $\pm 20\%$ 50V
C3025	0800015	EL 10MF $\pm 20\%$ 16V	C4012	0800003	EL 1MF $\pm 20\%$ 50V
C3026	0274763	PF 0.01MF $\pm 10\%$ 50V	C402	0248684	CD 100PF $\pm 5\%$ 50V
C3027	0800049	EL 100MF $\pm 20\%$ 16V	C4021	0800049	EL 100MF $\pm 20\%$ 16V
C303	0274763	PF 0.01MF $\pm 10\%$ 50V	C403	0248684	CD 100PF $\pm 5\%$ 50V
C304	0800015	EL 10MF $\pm 20\%$ 16V	C404	0800048	EL 100MF $\pm 20\%$ 10V
C305	0800041	EL 47MF $\pm 20\%$ 16V	C405	0880057	PF 0.1MF $\pm 10\%$ 50V
C307	0244139	CD 1000PF $\pm 10\%$ 50V	C4051	0274763	PF 0.01MF $\pm 10\%$ 50V
C308	0800003	EL 1MF $\pm 20\%$ 50V	C4052	0274763	PF 0.01MF $\pm 10\%$ 50V
C309	0248698	CD 560PF $\pm 5\%$ 50V	C4053	0880057	PF 0.1MF $\pm 10\%$ 50V
C310	0800003	EL 1MF $\pm 20\%$ 50V	C4054	0800009	EL 4.7MF $\pm 20\%$ 25V
C311	0274763	PF 0.01MF $\pm 10\%$ 50V	C4055	0800009	EL 4.7MF $\pm 20\%$ 25V
C312	0248420	CD 10PF $\pm 0.25\%$ 50V	C4056	0800041	EL 47MF $\pm 20\%$ 16V
C313	0248420	CD 10PF $\pm 0.25\%$ 50V	C4057	0800015	EL 10MF $\pm 20\%$ 16V
C314	0800003	EL 1MF $\pm 20\%$ 50V	C4058	0800015	EL 10MF $\pm 20\%$ 16V
C315	0274763	PF 0.01MF $\pm 10\%$ 50V	C4059	0800082	EL 1000MF $\pm 20\%$ 16V
C316	0800015	EL 10MF $\pm 20\%$ 16V	C406	0880057	PF 0.1MF $\pm 10\%$ 50V
C317	0274763	PF 0.01MF $\pm 10\%$ 50V	C407	0800084	EL 1000MF $\pm 20\%$ 31.5V
C318	0274763	PF 0.01MF $\pm 10\%$ 50V	C408	0800084	EL 1000MF $\pm 20\%$ 31.5V
C319	0274763	PF 0.01MF $\pm 10\%$ 50V	C409	0800084	EL 1000MF $\pm 20\%$ 31.5V
C320	0800003	EL 1MF $\pm 20\%$ 50V	C410	0880062	PF 0.22MF $\pm 10\%$ 50V
C321	0890115	CD 12PF $\pm 5\%$ 50V	C4101	0800058	EL 220MF $\pm 20\%$ 16V
C322	0274763	PF 0.01MF $\pm 10\%$ 50V	C4102	0800087	EL 2200MF $\pm 20\%$ 16V
C323	0800049	EL 100MF $\pm 20\%$ 16V	C4103	0800015	EL 10MF $\pm 20\%$ 16V
C324	0800049	EL 100MF $\pm 20\%$ 16V	C4104	0253942	EL 0.22MF $\pm 20\%$ 50V
C325	0274763	PF 0.01MF $\pm 10\%$ 50V	C4105	0259807	EL 10MF $\pm 20\%$ 16V
C326	0800015	EL 10MF $\pm 20\%$ 16V	C4106	0259807	EL 10MF $\pm 20\%$ 16V
C327	0800015	EL 10MF $\pm 20\%$ 16V	C4107	0800015	EL 10MF $\pm 20\%$ 16V
C328	0800058	EL 220MF $\pm 20\%$ 16V	C4108	0253942	EL 0.22MF $\pm 20\%$ 50V
C329	0274763	PF 0.01MF $\pm 10\%$ 50V	C4109	0800015	EL 10MF $\pm 20\%$ 16V
C330	0274763	PF 0.01MF $\pm 10\%$ 50V	C411	0800049	EL 100MF $\pm 20\%$ 16V
C331	0800015	EL 10MF $\pm 20\%$ 16V	C4110	0800015	EL 10MF $\pm 20\%$ 16V
C332	0800003	EL 1MF $\pm 20\%$ 50V	C4111	0253942	EL 0.22MF $\pm 20\%$ 50V
C333	0274763	PF 0.01MF $\pm 10\%$ 50V	C4112	0253942	EL 0.22MF $\pm 20\%$ 50V
C334	0274763	PF 0.01MF $\pm 10\%$ 50V	C4113	0274763	PF 0.01MF $\pm 10\%$ 50V
C336	0800003	EL 1MF $\pm 20\%$ 50V	C4114	0880057	PF 0.1MF $\pm 10\%$ 50V
C337	0244118	CD 470PF $\pm 10\%$ 50V	C4115	0800003	EL 1MF $\pm 20\%$ 50V
C338	0800058	EL 220MF $\pm 20\%$ 16V	C4116	0800003	EL 1MF $\pm 20\%$ 50V
C339	0248665	CD 16PF $\pm 5\%$ 50V	C452	0257048	EL 2.2MF $\pm 20\%$ 25V
C340	0244118	CD 470PF $\pm 10\%$ 50V	C454	0257048	EL 2.2MF $\pm 20\%$ 25V
C341	0248672	CD 33PF $\pm 5\%$ 50V	C455	0800084	EL 1000MF $\pm 20\%$ 31.5V
C342	0248684	CD 100PF $\pm 5\%$ 50V	C456	0800084	EL 1000MF $\pm 20\%$ 31.5V
C4001	0800003	EL 1MF $\pm 20\%$ 50V	C501	0248443	CD 13PF $\pm 5\%$ 50V
C4002	0248684	CD 100PF $\pm 5\%$ 50V	C502	0274763	PF 0.01MF $\pm 10\%$ 50V
C4003	0800003	EL 1MF $\pm 20\%$ 50V	C503	0274763	PF 0.01MF $\pm 10\%$ 50V
C4004	0248684	CD 100PF $\pm 5\%$ 50V	C504	0800001	EL 0.47MF $\pm 20\%$ 50V
C4005	0800003	EL 1MF $\pm 20\%$ 50V	C505	0800005	EL 2.2MF $\pm 20\%$ 50V
C4006	0248684	CD 100PF $\pm 5\%$ 50V	C506	0274763	PF 0.01MF $\pm 10\%$ 50V
C4007	0800003	EL 1MF $\pm 20\%$ 50V	C507	0800003	EL 1MF $\pm 20\%$ 50V
C4008	0248684	CD 100PF $\pm 5\%$ 50V	C508	0800003	EL 1MF $\pm 20\%$ 50V
C4009	0800003	EL 1MF $\pm 20\%$ 50V	C509	0800003	EL 1MF $\pm 20\%$ 50V
C401	0800048	EL 100MF $\pm 20\%$ 10V	C510	0800003	EL 1MF $\pm 20\%$ 50V

PRODUCT SAFETY NOTE: Components marked with a Δ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	DESCRIPTION	SYMBOL NO.	PART NO.	DESCRIPTION
C511	0800003	EL 1MF $\pm 20\%$ 50V	Δ C719	0244213	CD 1500PF $\pm 10\%$ 2KV
C512	0800049	EL 100MF $\pm 20\%$ 16V	Δ C721	0299940	PF 0.015MF $\pm 5\%$ 1.6KV
C516	0246444	CD 15PF $\pm 5\%$ 50V	Δ C722	0299709	PF 0.022MF $\pm 10\%$ 630V
C517	0274763	PF 0.01MF $\pm 10\%$ 50V	C723	0257911	EL 3.3MF $\pm 20\%$ 50V
C518	0274763	PF 0.01MF $\pm 10\%$ 50V	Δ C724	0299932	PP 0.33MF $\pm 10\%$ 200V
C519	0880057	PF 0.1MF $\pm 10\%$ 50V	Δ C725	0800003	EL 1MF $\pm 20\%$ 50V
C601	0244115	CD 560PF $\pm 10\%$ 50V	Δ C726	0299931	PP 0.27MF $\pm 10\%$ 200V
C602	0247882	CD 33PF $\pm 10\%$ 500V	C728	0244501	CD 1000PF $\pm 10\%$ 500V
C603	0274763	PF 0.01MF $\pm 10\%$ 50V	C730	0800076	EL 470MF $\pm 20\%$ 31.5V
C604	0800052	EL 100MF $\pm 20\%$ 35V	C731	0244509	CD 4700PF $\pm 10\%$ 500V
C605	0880053	PF 0.047MF $\pm 10\%$ 50V	C731A	0243506	CD 270PF $\pm 10\%$ 500V
C606	02527411	EL 3.3MF $\pm 20\%$ 50V	C732	0800075	EL 470MF $\pm 20\%$ 25V
C607	0253942	EL 0.22MF $\pm 20\%$ 50V	C733	0800056	EL 220MF $\pm 20\%$ 6.3V
C608	0800003	EL 1MF $\pm 20\%$ 50V	Δ C737	0800055	EL 100MF $\pm 20\%$ 100V
C609	0800001	EL 0.47MF $\pm 20\%$ 50V	C738	0259171	EL 4.7MF $\pm 20\%$ 250V
C611	0252969	EL 2200MF $\pm 20\%$ 25V	C739	0800015	EL 10MF $\pm 20\%$ 16V
C612	0800056	EL 220MF $\pm 20\%$ 6.3V	C741	0890074	CD 100PF $\pm 5\%$ 50V
C613	0880057	PF 0.1MF $\pm 10\%$ 50V	C742	0254822	EL 100M $\pm 20\%$ 160V
C615	0800023	EL 22MF $\pm 20\%$ 16V	C743	0800003	EL 1MF $\pm 20\%$ 50V
C616	0274771	PF 0.047MF $\pm 10\%$ 50V	C747	0880057	PF 0.1MF $\pm 10\%$ 50V
C617	0274763	PF 0.01MF $\pm 10\%$ 50V	Δ C748	0249137	CD 100PF $\pm 10\%$
C618	0244111	CD 6800PF $\pm 10\%$ 50V	C750	0800005	EL 2.2MF $\pm 20\%$ 50V
C619	0244107	CD 3300PF $\pm 10\%$ 50V	C751	0800044	EL 47MF $\pm 20\%$ 50V
C620	0880057	PF 0.1MF $\pm 10\%$ 50V	C752	0252419	EL 3.3MF $\pm 20\%$ 50V
C621	0244107	CD 3300PF $\pm 10\%$ 50V	C754	0800073	EL 470MF $\pm 20\%$ 10V
C622	0890087	CD 1000PF $\pm 10\%$ 50V	C770	0800007	EL 3.3MF $\pm 20\%$ 50V
C623	0292716	TA 1MF $\pm 10\%$ 20V	C771	0800001	EL 0.47MF $\pm 20\%$ 50V
C624	0244107	CD 3300PF $\pm 10\%$ 50V	C772	0800049	EL 100MF $\pm 20\%$ 16V
C650	0800003	EL 1MF $\pm 20\%$ 50V	C777	0243512	CD 820PF $\pm 10\%$ 500V
C651	0800005	EL 2.2MF $\pm 20\%$ 50V	C778	0243508	CD 390PF $\pm 10\%$ 500V
C652	0880035	PF 2200PF $\pm 10\%$ 50V	C851	0800049	EL 100MF $\pm 20\%$ 16V
C653	0800041	EL 47MF $\pm 20\%$ 16V	C852	0890087	CD 1000PF $\pm 10\%$ 50V
C655	0800018	EL 10MF $\pm 20\%$ 50V	C853	0257540	EL 4.7MF $\pm 20\%$ 250V
C656	0880053	PF 0.047MF $\pm 10\%$ 50V	C856	0244215	CD 2200PF $\pm 10\%$ 2KV
C657	0800003	EL 1MF $\pm 20\%$ 50V	C857	0244509	CD 4700PF $\pm 10\%$ 500V
C701	0244139	CD 1000PF $\pm 10\%$ 50V	C858	0244509	CD 4700PF $\pm 10\%$ 500V
C702	0800049	EL 100MF $\pm 20\%$ 16V	C859	0244509	CD 4700PF $\pm 10\%$ 500V
C703	0274767	PF 0.022MF $\pm 10\%$ 50V	C860	0890087	CD 1000PF $\pm 10\%$ 50V
C704	0800003	EL 1MF $\pm 20\%$ 50V	C861	0890087	CD 1000PF $\pm 10\%$ 50V
C705	0244103	CD 1500PF $\pm 10\%$ 50V	C862	0890087	CD 1000PF $\pm 10\%$ 50V
C706	0244104	CD 1800PF $\pm 10\%$ 50V	C863	0244141	CD 0.01MF $\pm 10\%$ 50V
C707	0800003	EL 1MF $\pm 20\%$ 50V	C865	0890087	CD 1000PF $\pm 10\%$ 50V
C708	0274763	PF 0.01MF $\pm 10\%$ 50V	C867	0890087	CD 1000PF $\pm 10\%$ 50V
C709	0248699	CD 390PF $\pm 5\%$ 50V	C870	0244139	CD 1000PF $\pm 10\%$ 50V
C710	0880044	PF 0.01MF $\pm 10\%$ 50V	C871	0244105	CD 2200PF $\pm 10\%$ 50V
C711	0274767	PF 0.022MF $\pm 10\%$ 50V	C872	0248684	CD 100PF $\pm 5\%$ 50V
Δ C712	0800003	EL 1MF $\pm 20\%$ 50V	C873	0248684	CD 100PF $\pm 5\%$ 50V
C713	0880044	PF 0.01MF $\pm 10\%$ 50V	C874	0248684	CD 100PF $\pm 5\%$ 50V
C714	0244503	CD 1500PF $\pm 10\%$ 50V	C875	0248684	CD 100PF $\pm 5\%$ 50V
C715	0247882	CD 33PF $\pm 10\%$ 500V	C876	0244541	CD 0.01MF $\pm 10\%$ 500V
C716	0880019	PF 0.33MF $\pm 10\%$ 50V	Δ C901	0279719	PF 0.22MF $\pm 10\%$ 125V
C717	0880019	PF 0.33MF $\pm 10\%$ 50V	C902	0249145	CD 4700PF $\pm 100\%$ 125V
Δ C718	0244213	CD 1500PF $\pm 10\%$ 2KV	C904	0249145	CD 4700PF $\pm 100\%$ 125V

CT7896B

CT7896B

PRODUCT SAFETY NOTE: Components marked with a Δ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	DESCRIPTION				SYMBOL NO.	PART NO.	DESCRIPTION			
C907	0253891	EL	470MF	±20%	200V	R0114	0187092	CF	13K OHM	±5%	1/16W
C908	0253891	EL	470MF	±20%	200V	R0115	0700047	CF	3.3K OHM	±5%	1/16W
C909	0244503	CD	1500PF	±10%	50V	R0116	0700067	CF	100K OHM	±5%	1/16W
C910	0254822	EL	100M	±20%	160V	R0117	0700067	CF	100K OHM	±5%	1/16W
ΔC911	0249394	CD	4700PF	±20%	125V	R0118	0700067	CF	100K OHM	±5%	1/16W
C913	0800084	EL	1000MF	±20%	31.5V	R0119	0700067	CF	100K OHM	±5%	1/16W
C914	0800003	EL	1MF	±20%	50V	R0120	0187076	CF	3K OHM	±5%	1/16W
C915	0880057	PF	0.1MF	±10%	50V	R0121	0187062	CF	750 OHM	±5%	1/16W
C916	0800049	EL	100MF	±20%	16V	R0122	0187068	CF	1.3K OHM	±5%	1/16W
C917	0880037	PF	3300PF	±10%	50V	R0123	0700046	CF	2.7K OHM	±5%	1/16W
C918	0880044	PF	0.01MF	±10%	50V	R0124	0700053	CF	8.2K OHM	±5%	1/16W
C919	0299009	PP	2200PF	±5%	100V	R0126	0700037	CF	560 OHM	±5%	1/16W
C920	0800015	EL	10MF	±20%	16V	R0127	0187062	CF	750 OHM	±5%	1/16W
C921	0890074	CD	100PF	±5%	50V	R0128	0700041	CF	1K OHM	±5%	1/16W
C922	0800005	EL	2.2MF	±20%	50V	R0129	0700044	CF	1.8K OHM	±5%	1/16W
C923	0890082	CD	390PF	±10%	50V	R0130	0187076	CF	3K OHM	±5%	1/16W
C924	0890081	CD	330PF	±10%	50V	R0131	0700052	CF	6.8K OHM	±5%	1/16W
C925	0880053	PF	0.047MF	±10%	50V	R0135	0700063	CF	47K OHM	±5%	1/16W
C926	0890077	CD	180PF	±10%	50V	R0136	0187100	CF	30K OHM	±5%	1/16W
C927	0243506	CD	270PF	±10%	500V	R0137	0700063	CF	47K OHM	±5%	1/16W
C928	0247856	CD	120PF	±5%	500V	R0138	0700055	CF	12K OHM	±5%	1/16W
C929	0279849	PF	0.015MF	±10%	100V	R0139	0700055	CF	12K OHM	±5%	1/16W
C930	0800006	EL	2.2MF	±20%	100V	R0141	0700064	CF	56K OHM	±5%	1/16W
C935	0244565	CD	4700PF	±10%	500V	R0142	0700064	CF	56K OHM	±5%	1/16W
C935A	0244565	CD	4700PF	±10%	500V	R0143	0700063	CF	47K OHM	±5%	1/16W
C936	0243509	CD	470PF	±10%	500V	R0144	0700055	CF	12K OHM	±5%	1/16W
C937	0299001	PP	0.001MF	±2%	100V	R0145	0700041	CF	1K OHM	±5%	1/16W
C938	0880035	PF	2200PF	±10%	50V	R0146	0700041	CF	1K OHM	±5%	1/16W
C951	0800055	EL	100MF	±20%	100V	R0147	0700041	CF	1K OHM	±5%	1/16W
C953	0800074	EL	470MF	±20%	16V	R0148	0700041	CF	1K OHM	±5%	1/16W
C954	0800083	EL	1000MF	±20%	25V	R0149	0700041	CF	1K OHM	±5%	1/16W
C955	0800016	EL	10MF	±20%	25V	R0150	0700041	CF	1K OHM	±5%	1/16W
C956	0800047	EL	100MF	±20%	6.3V	R0151	0700041	CF	1K OHM	±5%	1/16W
C957	0244565	CD	4700PF	±10%	500V	R0152	0700041	CF	1K OHM	±5%	1/16W
C958	0800053	EL	100MF	±20%	50V	R0153	0700067	CF	100K OHM	±5%	1/16W
C959	0800075	EL	470MF	±20%	25V	R0154	0700041	CF	1K OHM	±5%	1/16W
ΔC969	0249391	CD	1000PF	±10%		R0155	0700041	CF	1K OHM	±5%	1/16W
RESISTORS						R0157	0700067	CF	100K OHM	±5%	1/16W
						R0159	0700045	CF	2.2K OHM	±5%	1/16W
						R0160	0700045	CF	2.2K OHM	±5%	1/16W
R0101	0700041	CF	1K OHM	±5%	1/16W	R0161	0700045	CF	2.2K OHM	±5%	1/16W
R0102	0700045	CF	2.2 KOHM	±5%	1/16W	R0162	0700045	CF	2.2K OHM	±5%	1/16W
R0103	0700054	CF	10K OHM	±5%	1/16W	R0163	0700063	CF	47K OHM	±5%	1/16W
R0104	0700041	CF	1K OHM	±5%	1/16W	R0165	0700041	CF	1K OHM	±5%	1/16W
R0105	0700041	CF	1K OHM	±5%	1/16W	R0166	0700041	CF	1K OHM	±5%	1/16W
R0106	0700041	CF	1K OHM	±5%	1/16W	R0167	0700041	CF	1K OHM	±5%	1/16W
R0107	0700041	CF	1K OHM	±5%	1/16W	R0168	0700041	CF	1K OHM	±5%	1/16W
R0108	0187062	CF	750 OHM	±5%	1/16W	R0170	0700054	CF	10K OHM	±5%	1/16W
R0109	0700032	CF	220 OHM	±5%	1/16W	R0171	0700054	CF	10K OHM	±5%	1/16W
R0110	0700041	CF	1K OHM	±5%	1/16W	R0173	0700036	CF	470 OHM	±5%	1/16W
R0111	0700041	CF	1K OHM	±5%	1/16W	R0174	0700064	CF	56K OHM	±5%	1/16W
R0112	0700041	CF	1K OHM	±5%	1/16W	R0175	0700051	CF	5.6K OHM	±5%	1/16W
R0113	0700041	CF	1K OHM	±5%	1/16W	R0176	0700049	CF	4.7K OHM	±5%	1/16W

PRODUCT SAFETY NOTE: Components marked with a Δ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	DESCRIPTION				SYMBOL NO.	PART NO.	DESCRIPTION			
R0177	0700045	CF	2.2K OHM	±5%	1/16W	R0253	0114053	CF	33 OHM	±5%	1/4W
R0178	0700067	CF	100K OHM	±5%	1/16W	R0255	0700041	CF	1K OHM	±5%	1/16W
R0179	0700058	CF	22K OHM	±5%	1/16W	R0256	0700041	CF	1K OHM	±5%	1/16W
R0180	0700054	CF	10K OHM	±5%	1/16W	R0257	0700041	CF	1K OHM	±5%	1/16W
R0181	0700054	CF	10K OHM	±5%	1/16W	R0259	0700058	CF	22K OHM	±5%	1/16W
R0182	0700061	CF	33K OHM	±5%	1/16W	R0260	0700058	CF	22K OHM	±5%	1/16W
R0183	0700058	CF	22K OHM	±5%	1/16W	R0261	0700054	CF	10K OHM	±5%	1/16W
R0184	0700054	CF	10K OHM	±5%	1/16W	R0263	0700058	CF	22K OHM	±5%	1/16W
R0185	0700054	CF	10K OHM	±5%	1/16W	R0264	0700058	CF	22K OHM	±5%	1/16W
R0186	0700066	CF	82K OHM	±5%	1/16W	R0265	0700058	CF	22K OHM	±5%	1/16W
R0187	0700047	CF	3.3K OHM	±5%	1/16W	R0268	0700027	CF	100 OHM	±5%	1/16W
R0188	0700049	CF	4.7K OHM	±5%	1/16W	R0269	0700047	CF	3.3K OHM	±5%	1/16W
R0189	0700031	CF	180 OHM	±5%	1/16W	R0274	0700041	CF	1K OHM	±5%	1/16W
R0190	0700058	CF	22K OHM	±5%	1/16W	R0275	0700041	CF	1K OHM	±5%	1/16W
R0191	0700067	CF	100K OHM	±5%	1/16W	R0276	0700041	CF	1K OHM	±5%	1/16W
R0192	0700049	CF	4.7K OHM	±5%	1/16W	R0401	0150286	VR	5K OHM-B		
R0193	0700041	CF	1K OHM	±5%	1/16W	R0403	0100117	CF	150K OHM	±5%	1/8W
R0194	0700041	CF	1K OHM	±5%	1/16W	R0404	0700059	CF	27K OHM	±5%	1/16W
R0195	0700041	CF	1K OHM	±5%	1/16W	R0405	0150138	VR	20K OHM-B		
R0196	0700041	CF	1K OHM	±5%	1/16W	R0406	0187074	CF	2.4K OHM	±5%	1/16W
R0197	0700067	CF	100K OHM	±5%	1/16W	R0407	0700038	CF	470 OHM	±5%	1/16W
R0198	0700067	CF	100K OHM	±5%	1/16W	R0408	0150286	VR	5K OHM-B		
R0199	0700067	CF	100K OHM	±5%	1/16W	R0409	0150286	VR	5K OHM-B		
R0201	0700067	CF	100K OHM	±5%	1/16W	R0410A	0700064	CF	56K OHM	±5%	1/16W
R0202	0100067	CF	1.2K OHM	±5%	1/8W	R0410B	0700064	CF	56K OHM	±5%	1/16W
R0203	0700054	CF	10K OHM	±5%	1/16W	R0411	0700054	CF	10K OHM	±5%	1/16W
R0206	0700054	CF	10K OHM	±5%	1/16W	R0412	0700054	CF	10K OHM	±5%	1/16W
R0208	0700049	CF	4.7K OHM	±5%	1/16W	R0413	0700054	CF	10K OHM	±5%	1/16W
R0209	0700052	CF	6.8K OHM	±5%	1/16W	R0414	0700046	CF	2.7K OHM	±5%	1/16W
R0214	0700054	CF	10K OHM	±5%	1/16W	R0415	0700054	CF	10K OHM	±5%	1/16W
R0215	0700048	CF	3.9K OHM	±5%	1/16W	R0416	0700054	CF	10K OHM	±5%	1/16W
R0216	0700056	CF	15K OHM	±5%	1/16W	R0417	0700038	CF	680 OHM	±5%	1/16W
R0219	0700057	CF	18K OHM	±5%	1/16W	R0418	0700038	CF	680 OHM	±5%	1/16W
R0220	0700058	CF	22K OHM	±5%	1/16W	R0419	0700066	CF	82K OHM	±5%	1/16W
R0221	0700046	CF	2.7K OHM	±5%	1/16W	R0420	0150139	VR	50K OHM-B		
R0222	0700049	CF	4.7K OHM	±5%	1/16W	R0421	0700041	CF	1K OHM	±5%	1/16W
R0223	0100065	CF	1K OHM	±5%	1/8W	R0422	0100065	CF	1K OHM	±5%	1/8W
R0224	0700041	CF	1K OHM	±5%	1/16W	R0423	0100065	CF	1K OHM	±5%	1/8W
R0225	0700054	CF	10K OHM	±5%	1/16W	R0426	0700054	CF	10K OHM	±5%	1/16W
R0226	0100111	CF	82K OHM	±5%	1/8W	R0429	0187080	CF	4.3K OHM	±5%	1/16W
R0227	0100119	CF	180K OHM	±5%	1/8W	R0430	0187080	CF	4.3K OHM	±5%	1/16W
R0228	0100121	CF	220K OHM	±5%	1/8W	R0432	0700051	CF	5.6K OHM	±5%	1/16W
R0229	0100127	CF	390K OHM	±5%	1/8W	R0433	0114133	CF	120 OHM	±5%	1/4W
R0234	0100077	CF	3.3K OHM	±5%	1/8W	R0434	0100121	CF	220K OHM	±5%	1/8W
R0235	0100077	CF	3.3K OHM	±5%	1/8W	R0435	0100133	CF	680K OHM	±5%	1/8W
R0236	0100077	CF	3.3K OHM	±5%	1/8W	△R0436	0119514	FR	10 OHM	±5%	1/4W
R0245	0100089	CF	10K OHM	±5%	1/8W	R0501	0113725	CF	100 OHM	±5%	1/2W
R0246	0700032	CF	220 OHM	±5%	1/16W	R0502	0187026	CF	24 OHM	±5%	1/16W
R0247	0700032	CF	220 OHM	±5%	1/16W	R0504	0100049	CF	220 OHM	±5%	1/8W
R0248	0700051	CF	5.6K OHM	±5%	1/16W	R0505	0100049	CF	220 OHM	±5%	1/8W
R0249	0700047	CF	3.3K OHM	±5%	1/16W	R0506	0100049	CF	220 OHM	±5%	1/8W
R0250	0700064	CF	56K OHM	±5%	1/16W	R0507	0100049	CF	220 OHM	±5%	1/8W
R0251	0700054	CF	10K OHM	±5%	1/16W	R0508	0100049	CF	220 OHM	±5%	1/8W

CT7896B

PRODUCT SAFETY NOTE: Components marked with a Δ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	DESCRIPTION	SYMBOL NO.	PART NO.	DESCRIPTION
R0509	0100049	CF 220 OHM $\pm 5\%$ 1/8W	R3035	0700037	CF 560 OHM $\pm 5\%$ 1/16W
R0513	0700041	CF 1K OHM $\pm 5\%$ 1/16W	R3036	0114137	CF 180 OHM $\pm 5\%$ 1/4W
R0514	0700041	CF 1K OHM $\pm 5\%$ 1/16W	R3037	0700038	CF 680 OHM $\pm 5\%$ 1/16W
R0515	0700041	CF 1K OHM $\pm 5\%$ 1/16W	R3038	0700037	CF 560 OHM $\pm 5\%$ 1/16W
R0521	0100049	CF 220 OHM $\pm 5\%$ 1/8W	R3039	0700032	CF 220 OHM $\pm 5\%$ 1/16W
R0522	0100049	CF 220 OHM $\pm 5\%$ 1/8W	R304	0100059	CF 560 OHM $\pm 5\%$ 1/8W
R0523	0100049	CF 220 OHM $\pm 5\%$ 1/8W	R3040	0700038	CF 680 OHM $\pm 5\%$ 1/16W
R0524	0100049	CF 220 OHM $\pm 5\%$ 1/8W	R3041	0150283	VR 1K OHM-B
R0525	0100049	CF 220 OHM $\pm 5\%$ 1/8W	R3042	0700041	CF 1K OHM $\pm 5\%$ 1/16W
R0528	0114062	CF 75 OHM $\pm 5\%$ 1/4W	R3043	0700037	CF 560 OHM $\pm 5\%$ 1/16W
R0534	0100089	CF 10K OHM $\pm 5\%$ 1/8W	R3044	0700045	CF 2.2K OHM $\pm 5\%$ 1/16W
R0541	0100095	CF 18K OHM $\pm 5\%$ 1/8W	R3045	0150286	VR 5K OHM-B
R0542	0100049	CF 220 OHM $\pm 5\%$ 1/8W	R3046	0700032	CF 220 OHM $\pm 5\%$ 1/16W
R0544	0114062	CF 75 OHM $\pm 5\%$ 1/4W	R3047	0700041	CF 1K OHM $\pm 5\%$ 1/16W
R0545	0700058	CF 22K OHM $\pm 5\%$ 1/16W	R3048	0700041	CF 1K OHM $\pm 5\%$ 1/16W
R0546	0100059	CF 560 OHM $\pm 5\%$ 1/8W	R3049	0700063	CF 47K OHM $\pm 5\%$ 1/16W
R102	0113725	CF 100 OHM $\pm 5\%$ 1/2W	R305	0100125	CF 330K OHM $\pm 5\%$ 1/8W
Δ R103	01195051	FR 2.2 OHM $\pm 5\%$ 1/4W	R3050	0700063	CF 47K OHM $\pm 5\%$ 1/16W
R104	0100057	CF 470 OHM $\pm 5\%$ 1/8W	R3052	0700027	CF 100 OHM $\pm 5\%$ 1/16W
R151	0100065	CF 1K OHM $\pm 5\%$ 1/8W	R3053	0700041	CF 1K OHM $\pm 5\%$ 1/16W
R151A	0700022	CF 39 OHM $\pm 5\%$ 1/16W	R3054	0700037	CF 560 OHM $\pm 5\%$ 1/16W
R3001	0100038	CF 75 OHM $\pm 5\%$ 1/8W	R3055	0150282	VR 500 OHM-B
R3002	0100041	CF 100 OHM $\pm 5\%$ 1/8W	R3056	0700037	CF 560 OHM $\pm 5\%$ 1/16W
R3003	0100038	CF 75 OHM $\pm 5\%$ 1/8W	R3057	0700045	CF 2.2K OHM $\pm 5\%$ 1/16W
R3004	0100041	CF 100 OHM $\pm 5\%$ 1/8W	R306	0700054	CF 10K OHM $\pm 5\%$ 1/16W
R3005	0100113	CF 100K OHM $\pm 5\%$ 1/8W	R3063	0700032	CF 220 OHM $\pm 5\%$ 1/16W
R3006	0100037	CF 68 OHM $\pm 5\%$ 1/8W	R3064	0700041	CF 1K OHM $\pm 5\%$ 1/16W
R3007	0100041	CF 100 OHM $\pm 5\%$ 1/8W	R3065	0100059	CF 560 OHM $\pm 5\%$ 1/8W
R3008	0113733	CF 220 OHM $\pm 5\%$ 1/2W	R3066	0700047	CF 3.3K OHM $\pm 5\%$ 1/16W
R3009	0113725	CF 100 OHM $\pm 5\%$ 1/2W	R307	0700049	CF 4.7K OHM $\pm 5\%$ 1/16W
R301	0700032	CF 220 OHM $\pm 5\%$ 1/16W	R308	0700054	CF 10K OHM $\pm 5\%$ 1/16W
R3010	0100038	CF 75 OHM $\pm 5\%$ 1/8W	R310	0700049	CF 4.7K OHM $\pm 5\%$ 1/16W
R3011	0100041	CF 100 OHM $\pm 5\%$ 1/8W	R311	0100117	CF 150K OHM $\pm 5\%$ 1/8W
R3012	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R312	0700039	CF 820 OHM $\pm 5\%$ 1/16W
R3013	0700048	CF 3.9K OHM $\pm 5\%$ 1/16W	R313	0700054	CF 10K OHM $\pm 5\%$ 1/16W
R3014	0187052	CF 300 OHM $\pm 5\%$ 1/16W	R315	0700041	CF 1K OHM $\pm 5\%$ 1/16W
R3015	0187052	CF 300 OHM $\pm 5\%$ 1/16W	R316	0700033	CF 270 OHM $\pm 5\%$ 1/16W
R3016	0100038	CF 75 OHM $\pm 5\%$ 1/8W	R317	0700044	CF 1.8K OHM $\pm 5\%$ 1/16W
R3017	0100041	CF 100 OHM $\pm 5\%$ 1/8W	R318	0700054	CF 10K OHM $\pm 5\%$ 1/16W
R3018	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R319	0700054	CF 10K OHM $\pm 5\%$ 1/16W
R3019	0700048	CF 3.9K OHM $\pm 5\%$ 1/16W	R320	0700056	CF 15K OHM $\pm 5\%$ 1/16W
R302	0700062	CF 39K OHM $\pm 5\%$ 1/16W	R321	0700054	CF 10K OHM $\pm 5\%$ 1/16W
R3020	0187052	CF 300 OHM $\pm 5\%$ 1/16W	R322	0700048	CF 3.9K OHM $\pm 5\%$ 1/16W
R3021	0700041	CF 1K OHM $\pm 5\%$ 1/16W	R323	0700051	CF 5.6K OHM $\pm 5\%$ 1/16W
R3022	0700041	CF 1K OHM $\pm 5\%$ 1/16W	R325	0700067	CF 100K OHM $\pm 5\%$ 1/16W
R3025	0700064	CF 56K OHM $\pm 5\%$ 1/16W	R327	0100127	CF 390K OHM $\pm 5\%$ 1/8W
R3026	0700036	CF 390 OHM $\pm 5\%$ 1/16W	R328	0187106	CF 51K OHM $\pm 5\%$ 1/16W
R3027	0700034	CF 330 OHM $\pm 5\%$ 1/16W	R329	0700059	CF 27K OHM $\pm 5\%$ 1/16W
R303	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R330	0700049	CF 4.7K OHM $\pm 5\%$ 1/16W
R3031	0700063	CF 47K OHM $\pm 5\%$ 1/16W	R332	0100123	CF 270K OHM $\pm 5\%$ 1/8W
R3032	0700063	CF 47K OHM $\pm 5\%$ 1/16W	R333	0700054	CF 10K OHM $\pm 5\%$ 1/16W
R3033	0700039	CF 820 OHM $\pm 5\%$ 1/16W	R334	0700041	CF 1K OHM $\pm 5\%$ 1/16W
R3034	0700037	CF 560 OHM $\pm 5\%$ 1/16W	R335	0700034	CF 330 OHM $\pm 5\%$ 1/16W

PRODUCT SAFETY NOTE: Components marked with a Δ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	DESCRIPTION	SYMBOL NO.	PART NO.	DESCRIPTION
R336	0700045	CF 2.2K OHM $\pm 5\%$ 1/16W	R4026	0700067	CF 100K OHM $\pm 5\%$ 1/16W
R337	0700041	CF 1K OHM $\pm 5\%$ 1/16W	R4027	0700067	CF 100K OHM $\pm 5\%$ 1/16W
R338	0700027	CF 100 OHM $\pm 5\%$ 1/16W	R4028	0700041	CF 1K OHM $\pm 5\%$ 1/16W
R339	0100053	CF 330 OHM $\pm 5\%$ 1/8W	Δ R403	01195051	FR 2.2 OHM $\pm 5\%$ 1/4W
R340	0700014	CF 10 OHM $\pm 5\%$ 1/16W	R4039	0113725	CF 100 OHM $\pm 5\%$ 1/2W
R341	0700047	CF 3.3K OHM $\pm 5\%$ 1/16W	Δ R404	01195051	FR 2.2 OHM $\pm 5\%$ 1/4W
R342	0114145	CF 390 OHM $\pm 5\%$ 1/4W	R4040	0100065	CF 1K OHM $\pm 5\%$ 1/8W
R343	0700045	CF 2.2K OHM $\pm 5\%$ 1/8W	R4041	0100065	CF 1K OHM $\pm 5\%$ 1/8W
R345	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R4042	0100065	CF 1K OHM $\pm 5\%$ 1/8W
R351	0700031	CF 180 OHM $\pm 5\%$ 1/16W	R4043	0100065	CF 1K OHM $\pm 5\%$ 1/8W
R352	0700051	CF 5.6K OHM $\pm 5\%$ 1/8W	R4044	0100049	CF 220 OHM $\pm 5\%$ 1/8W
R354	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R4045	0100049	CF 220 OHM $\pm 5\%$ 1/8W
R355	0700045	CF 2.2K OHM $\pm 5\%$ 1/16W	R405	0700087	CF 100K OHM $\pm 5\%$ 1/16W
R356	0700047	CF 3.3K OHM $\pm 5\%$ 1/16W	R4051	0700044	CF 1.8K OHM $\pm 5\%$ 1/16W
R357	0700057	CF 18K OHM $\pm 5\%$ 1/16W	R4052	0700044	CF 1.8K OHM $\pm 5\%$ 1/16W
R358	0150287	VR 10K OHM-B	R4053	0700053	CF 8.2K OHM $\pm 5\%$ 1/16W
R359	0700059	CF 27K OHM $\pm 5\%$ 1/16W	R4054	0700053	CF 8.2K OHM $\pm 5\%$ 1/16W
R361	0700051	CF 5.6K OHM $\pm 5\%$ 1/16W	R4055	0150284	VR 2K OHM-B
R362	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R4056	0700054	CF 10K OHM $\pm 5\%$ 1/16W
R363	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R4057	0700054	CF 10K OHM $\pm 5\%$ 1/16W
R364	0700047	CF 3.3K OHM $\pm 5\%$ 1/16W	R4058	0700053	CF 8.2K OHM $\pm 5\%$ 1/16W
R366	0700027	CF 100 OHM $\pm 5\%$ 1/16W	R4059	0700045	CF 2.2K OHM $\pm 5\%$ 1/16W
R367	0187048	CF 200 OHM $\pm 5\%$ 1/16W	R406	0100059	CF 560 OHM $\pm 5\%$ 1/8W
R370	0700041	CF 1K OHM $\pm 5\%$ 1/16W	R4060	0700043	CF 1.5K OHM $\pm 5\%$ 1/16W
R371	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R4061	0700037	CF 560 OHM $\pm 5\%$ 1/16W
R372	0700045	CF 2.2K OHM $\pm 5\%$ 1/16W	R4062	0700051	CF 5.6K OHM $\pm 5\%$ 1/16W
R373	0700061	CF 33K OHM $\pm 5\%$ 1/16W	R4063	0700051	CF 5.6K OHM $\pm 5\%$ 1/16W
R374	0700058	CF 22K OHM $\pm 5\%$ 1/16W	R4064	0700027	CF 100 OHM $\pm 5\%$ 1/16W
R375	0700061	CF 33K OHM $\pm 5\%$ 1/16W	R4065	0700027	CF 100 OHM $\pm 5\%$ 1/16W
R376	0700043	CF 1.5K OHM $\pm 5\%$ 1/16W	R4066	0700041	CF 1K OHM $\pm 5\%$ 1/16W
R377	0187080	CF 4.3K OHM $\pm 5\%$ 1/16W	R4067	0700041	CF 1K OHM $\pm 5\%$ 1/16W
R378	0100121	CF 220K OHM $\pm 5\%$ 1/8W	R4068	0700053	CF 8.2K OHM $\pm 5\%$ 1/16W
R4001	0100065	CF 1K OHM $\pm 5\%$ 1/8W	R4069	0700053	CF 8.2K OHM $\pm 5\%$ 1/16W
R4002	0100065	CF 1K OHM $\pm 5\%$ 1/8W	R407	0700058	CF 22K OHM $\pm 5\%$ 1/16W
R4003	0100113	CF 100K OHM $\pm 5\%$ 1/8W	Δ R4070	0119514	FR 10 OHM $\pm 5\%$ 1/4W
R4004	0100113	CF 100K OHM $\pm 5\%$ 1/8W	R4071	0700027	CF 100 OHM $\pm 5\%$ 1/16W
R4005	0100065	CF 1K OHM $\pm 5\%$ 1/8W	R4072	0700027	CF 100 OHM $\pm 5\%$ 1/16W
R4006	0100065	CF 1K OHM $\pm 5\%$ 1/8W	R408	0700051	CF 5.6K OHM $\pm 5\%$ 1/16W
R4007	0100113	CF 100K OHM $\pm 5\%$ 1/8W	R4101	0100065	CF 1K OHM $\pm 5\%$ 1/8W
R4008	0100113	CF 100K OHM $\pm 5\%$ 1/8W	R4102	0700027	CF 100 OHM $\pm 5\%$ 1/16W
R4009	0100065	CF 1K OHM $\pm 5\%$ 1/8W	R4103	0700045	CF 2.2K OHM $\pm 5\%$ 1/16W
R401	0100038	CF 75 OHM $\pm 5\%$ 1/8W	R4104	0700045	CF 2.2K OHM $\pm 5\%$ 1/16W
R4010	0100065	CF 1K OHM $\pm 5\%$ 1/8W	R4105	0700064	CF 56K OHM $\pm 5\%$ 1/16W
R4011	0100113	CF 100K OHM $\pm 5\%$ 1/8W	R4106	0700055	CF 12K OHM $\pm 5\%$ 1/16W
R4012	0100113	CF 100K OHM $\pm 5\%$ 1/8W	R4107	0700041	CF 1K OHM $\pm 5\%$ 1/16W
R4013	0100065	CF 1K OHM $\pm 5\%$ 1/8W	R4108	0700033	CF 270 OHM $\pm 5\%$ 1/16W
R4014	0100065	CF 1K OHM $\pm 5\%$ 1/8W	R4109	0700064	CF 56K OHM $\pm 5\%$ 1/16W
R4015	0100113	CF 100K OHM $\pm 5\%$ 1/8W	R4110	0700055	CF 12K OHM $\pm 5\%$ 1/16W
R4016	0100113	CF 100K OHM $\pm 5\%$ 1/8W	R4111	0700041	CF 1K OHM $\pm 5\%$ 1/16W
R402	0100038	CF 75 OHM $\pm 5\%$ 1/8W	R4112	0700033	CF 270 OHM $\pm 5\%$ 1/16W
R4023	0700067	CF 100K OHM $\pm 5\%$ 1/16W	R4113	0700032	CF 220 OHM $\pm 5\%$ 1/16W
R4024	0700067	CF 100K OHM $\pm 5\%$ 1/16W	R4114	0700032	CF 220 OHM $\pm 5\%$ 1/16W
R4025	0700041	CF 1K OHM $\pm 5\%$ 1/16W	R4115	0700052	CF 6.8K OHM $\pm 5\%$ 1/16W

PRODUCT SAFETY NOTE: Components marked with a Δ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	DESCRIPTION	SYMBOL NO.	PART NO.	DESCRIPTION
R4116	0700052	CF 6.8K OHM $\pm 5\%$ 1/16W	R623	0700046	CF 2.7K OHM $\pm 5\%$ 1/16W
R4117	0700063	CF 47K OHM $\pm 5\%$ 1/16W	R624A	0700052	CF 6.8K OHM $\pm 5\%$ 1/16W
R412	0114161	CF 1K OHM $\pm 5\%$ 1/4W	R625	0154461	VR 5K OHM-B
R413	0114161	CF 1K OHM $\pm 5\%$ 1/4W	R626	0700057	CF 18K OHM $\pm 5\%$ 1/16W
R501	0100125	CF 330K OHM $\pm 5\%$ 1/8W	R627	0100121	CF 220K OHM $\pm 5\%$ 1/8W
R502	0700049	CF 4.7K OHM $\pm 5\%$ 1/16W	R628	0700061	CF 33K OHM $\pm 5\%$ 1/16W
R503	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R629	0700061	CF 33K OHM $\pm 5\%$ 1/16W
R504	0700058	CF 22K OHM $\pm 5\%$ 1/16W	R633	0187074	CF 2.4K OHM $\pm 5\%$ 1/16W
R505	0700066	CF 82K OHM $\pm 5\%$ 1/16W	R650	0700064	CF 56K OHM $\pm 5\%$ 1/16W
R506	0700066	CF 82K OHM $\pm 5\%$ 1/16W	R651	0700064	CF 56K OHM $\pm 5\%$ 1/16W
R507	0100049	CF 220 OHM $\pm 5\%$ 1/8W	R652	0700064	CF 56K OHM $\pm 5\%$ 1/16W
R508	0100049	CF 220 OHM $\pm 5\%$ 1/8W	R653	0700064	CF 56K OHM $\pm 5\%$ 1/16W
R509	0100049	CF 220 OHM $\pm 5\%$ 1/8W	R654	0700054	CF 10K OHM $\pm 5\%$ 1/16W
R510	0700063	CF 47K OHM $\pm 5\%$ 1/16W	R655	0700057	CF 18K OHM $\pm 5\%$ 1/16W
R511	0700059	CF 27K OHM $\pm 5\%$ 1/16W	R656	0700049	CF 4.7K OHM $\pm 5\%$ 1/16W
R512	0700067	CF 100K OHM $\pm 5\%$ 1/16W	R657	0114139	CF 220 OHM $\pm 5\%$ 1/4W
R513	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R658	0100131	CF 560K OHM $\pm 5\%$ 1/8W
R514	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R660	0700045	CF 2.2K OHM $\pm 5\%$ 1/16W
R515	0700052	CF 6.8K OHM $\pm 5\%$ 1/16W	R661	0700042	CF 1.2K OHM $\pm 5\%$ 1/16W
R516	0700049	CF 4.7K OHM $\pm 5\%$ 1/16W	R662	0110133	MF 330 OHM $\pm 5\%$ 1W
R517	0700032	CF 220 OHM $\pm 5\%$ 1/16W	R663	0700062	CF 39K OHM $\pm 5\%$ 1/16W
R519	0700041	CF 1K OHM $\pm 5\%$ 1/16W	R664	0100057	CF 470 OHM $\pm 5\%$ 1/8W
R520	0700037	CF 560 OHM $\pm 5\%$ 1/16W	R665	0700063	CF 47K OHM $\pm 5\%$ 1/16W
R521	0700066	CF 82K OHM $\pm 5\%$ 1/16W	R666	0700067	CF 100K OHM $\pm 5\%$ 1/16W
R522	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R667	0100129	CF 470K OHM $\pm 5\%$ 1/8W
R523	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R701	0700046	CF 2.7K OHM $\pm 5\%$ 1/16W
R524	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R702	0700024	CF 56 OHM $\pm 5\%$ 1/16W
R527	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R703	0700047	CF 3.3K OHM $\pm 5\%$ 1/16W
R528	0100117	CF 150K OHM $\pm 5\%$ 1/8W	R704	0700034	CF 330 OHM $\pm 5\%$ 1/16W
R529	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R706	0700049	CF 4.7K OHM $\pm 5\%$ 1/16W
R530	0700065	CF 68K OHM $\pm 5\%$ 1/16W	R707	0700039	CF 820 OHM $\pm 5\%$ 1/16W
R531	0100125	CF 330K OHM $\pm 5\%$ 1/8W	R708	0100117	CF 150K OHM $\pm 5\%$ 1/8W
R532	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R709	0700046	CF 2.7K OHM $\pm 5\%$ 1/16W
R533	0700041	CF 1K OHM $\pm 5\%$ 1/16W	R710	0700045	CF 2.2K OHM $\pm 5\%$ 1/16W
R601	0700027	CF 100 OHM $\pm 5\%$ 1/16W	R711	0110249	MF 1.5K OHM $\pm 5\%$ 2W
R602	0700027	CF 100 OHM $\pm 5\%$ 1/16W	R712	0110255	MF 2.7K OHM $\pm 5\%$ 2W
R604	0700034	CF 330 OHM $\pm 5\%$ 1/16W	R712A	0110253	MF 2.2K OHM $\pm 5\%$ 2W
R605	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R713	0700067	CF 100K OHM $\pm 5\%$ 1/16W
R606	0700059	CF 27K OHM $\pm 5\%$ 1/16W	R714	0700051	CF 5.6K OHM $\pm 5\%$ 1/16W
R607	0700063	CF 47K OHM $\pm 5\%$ 1/16W	R715	0100123	CF 270K OHM $\pm 5\%$ 1/8W
R608	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R716	0113754	CF 1.5K OHM $\pm 5\%$ 1/2W
R609	0150280	VR 200 OHM-B	R717	0700067	CF 100K OHM $\pm 5\%$ 1/16W
R610	0700029	CF 150 OHM $\pm 5\%$ 1/16W	R718	0100037	CF 68 OHM $\pm 5\%$ 1/8W
R611	0113686	CF 2.7 OHM $\pm 5\%$ 1/2W	R720	0114143	CF 330 OHM $\pm 5\%$ 1/4W
R612	0113688	CF 3.3 OHM $\pm 5\%$ 1/2W	Δ R721	01195121	FR 1 OHM $\pm 5\%$ 1/4W
R613	0113735	CF 270 OHM $\pm 5\%$ 1/2W	Δ R722	0119838	FR 0.5 OHM $\pm 5\%$ 1/4W
R614	0113746	CF 680 OHM $\pm 5\%$ 1/2W	Δ R723	0119838	FR 0.5 OHM $\pm 5\%$ 1/4W
R615	0700037	CF 560 OHM $\pm 5\%$ 1/16W	Δ R724	01195121	FR 1 OHM $\pm 5\%$ 1/4W
R616	0700032	CF 220 OHM $\pm 5\%$ 1/16W	Δ R725	01195121	FR 1 OHM $\pm 5\%$ 1/4W
R617	0700036	CF 470 OHM $\pm 5\%$ 1/16W	Δ R726	01195051	FR 2.2 OHM $\pm 5\%$ 1/4W
R620	0187110	CF 75K OHM $\pm 5\%$ 1/16W	R727	0119691	MF 0.33 OHM $\pm 5\%$ 1W
R621	0700041	CF 1K OHM $\pm 5\%$ 1/16W	R728	0700044	CF 1.8K OHM $\pm 5\%$ 1/16W
R622	0700046	CF 2.7K OHM $\pm 5\%$ 1/16W	Δ R729	0700048	CF 3.9K OHM $\pm 5\%$ 1/16W

PRODUCT SAFETY NOTE: Components marked with a Δ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	DESCRIPTION	SYMBOL NO.	PART NO.	DESCRIPTION
R732	0100077	CF 3.3K OHM $\pm 5\%$ 1/8W	R807	0100089	CF 10K OHM $\pm 5\%$ 1/8W
R733	0100073	CF 2.2K OHM $\pm 5\%$ 1/8W	R808	0100089	CF 10K OHM $\pm 5\%$ 1/8W
R734	0110241	MF 680 OHM $\pm 5\%$ 2W	R811	0100087	CF 8.2K OHM $\pm 5\%$ 1/8W
R735	0110153	MF 2.2K OHM $\pm 5\%$ 1W	R812	0100087	CF 8.2K OHM $\pm 5\%$ 1/8W
Δ R736	0700032	CF 220 OHM $\pm 5\%$ 1/16W	R813	0100087	CF 8.2K OHM $\pm 5\%$ 1/8W
R737	0100057	CF 470 OHM $\pm 5\%$ 1/8W	R821	0100041	CF 100K OHM $\pm 5\%$ 1/8W
R738	0100102	CF 36K OHM $\pm 5\%$ 1/8W	R851	0110367	MF 8.2K OHM $\pm 5\%$ 3W
Δ R740	0700053	CF 8.2K OHM $\pm 5\%$ 1/16W	R852	0110367	MF 8.2K OHM $\pm 5\%$ 3W
R742	0114285	CF 150K OHM $\pm 5\%$ 1/4W	R853	0110367	MF 8.2K OHM $\pm 5\%$ 3W
R743	0700048	CF 3.9K OHM $\pm 5\%$ 1/16W	R854	0113766	CF 4.7K OHM $\pm 5\%$ 1/2W
R744	0110209	MF 33 OHM $\pm 5\%$ 2W	R855	0113766	CF 4.7K OHM $\pm 5\%$ 1/2W
R744A	0110101	MF 15 OHM $\pm 5\%$ 1W	R856	0113766	CF 4.7K OHM $\pm 5\%$ 1/2W
Δ R745	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R857	0113766	CF 4.7K OHM $\pm 5\%$ 1/2W
Δ R746	0700053	CF 8.2K OHM $\pm 5\%$ 1/16W	R858	0113766	CF 4.7K OHM $\pm 5\%$ 1/2W
R747	0110151	MF 1.8K OHM $\pm 5\%$ 1W	R859	0113766	CF 4.7K OHM $\pm 5\%$ 1/2W
R748	0187026	CF 24 OHM $\pm 5\%$ 1/16W	R860	0100032	CF 43 OHM $\pm 5\%$ 1/8W
R750	0100073	CF 2.2K OHM $\pm 5\%$ 1/8W	R861	0100032	CF 43 OHM $\pm 5\%$ 1/8W
R751	0700063	CF 47K OHM $\pm 5\%$ 1/16W	R862	0100032	CF 43 OHM $\pm 5\%$ 1/8W
R752	0150309	VR 100K OHM-B	R863	0100032	CF 43 OHM $\pm 5\%$ 1/8W
R753	0700055	CF 12K OHM $\pm 5\%$ 1/16W	R864	0100032	CF 43 OHM $\pm 5\%$ 1/8W
R754	0700033	CF 270 OHM $\pm 5\%$ 1/16W	R865	0100032	CF 43 OHM $\pm 5\%$ 1/8W
R755	0150306	VR 20K OHM-B	R866	0100093	CF 15K OHM $\pm 5\%$ 1/8W
R756	0700057	CF 18K OHM $\pm 5\%$ 1/16W	R867	0100093	CF 15K OHM $\pm 5\%$ 1/8W
R757	0700056	CF 15K OHM $\pm 5\%$ 1/16W	R868	0100093	CF 15K OHM $\pm 5\%$ 1/8W
R758	0700048	CF 3.9K OHM $\pm 5\%$ 1/16W	R869	0113778	CF 15K OHM $\pm 5\%$ 1/2W
R759	0700064	CF 56K OHM $\pm 5\%$ 1/16W	R870	0113781	CF 18K OHM $\pm 5\%$ 1/2W
R760	0700065	CF 68K OHM $\pm 5\%$ 1/16W	R871	0113778	CF 15K OHM $\pm 5\%$ 1/2W
R762	0700053	CF 8.2K OHM $\pm 5\%$ 1/16W	R872	0113781	CF 18K OHM $\pm 5\%$ 1/2W
R763	0110269	MF 10K OHM $\pm 5\%$ 2W	R873	0113778	CF 15K OHM $\pm 5\%$ 1/2W
R764	0100089	CF 10K OHM $\pm 5\%$ 1/8W	R874	0113781	CF 18K OHM $\pm 5\%$ 1/2W
R765	0700056	CF 15K OHM $\pm 5\%$ 1/16W	R875	0113750	CF 1K OHM $\pm 5\%$ 1/2W
R766	0700032	CF 220 OHM $\pm 5\%$ 1/16W	R876	0113750	CF 1K OHM $\pm 5\%$ 1/2W
R767	0700044	CF 1.8K OHM $\pm 5\%$ 1/16W	R877	0113750	CF 1K OHM $\pm 5\%$ 1/2W
R768	0700061	CF 33K OHM $\pm 5\%$ 1/16W	R878	0100053	CF 330 OHM $\pm 5\%$ 1/8W
R769	0700054	CF 10K OHM $\pm 5\%$ 1/16W	R879	0100053	CF 330 OHM $\pm 5\%$ 1/8W
R770	0700035	CF 390 OHM $\pm 5\%$ 1/16W	R880	0100053	CF 330 OHM $\pm 5\%$ 1/8W
R771	0700042	CF 1.2K OHM $\pm 5\%$ 1/16W	R881	0114131	CF 100 OHM $\pm 5\%$ 1/4W
R772	0700064	CF 56K OHM $\pm 5\%$ 1/16W	R882	0114131	CF 100 OHM $\pm 5\%$ 1/4W
R773	0700032	CF 220 OHM $\pm 5\%$ 1/16W	R883	0114131	CF 100 OHM $\pm 5\%$ 1/4W
R774	0700064	CF 56K OHM $\pm 5\%$ 1/16W	R884	0100061	CF 680 OHM $\pm 5\%$ 1/8W
R775	0100061	CF 680 OHM $\pm 5\%$ 1/8W	R885	0150112	VR 2K OHM-B
R777	0700032	CF 220 OHM $\pm 5\%$ 1/16W	R886	0100041	CF 100 OHM $\pm 5\%$ 1/8W
R778	0100055	CF 390 OHM $\pm 5\%$ 1/8W	R887	0150109	VR 200 OHM-B RS-6
R779	0700041	CF 1K OHM $\pm 5\%$ 1/16W	R888	0100061	CF 680 OHM $\pm 5\%$ 1/8W
R780	0700043	CF 1.5K OHM $\pm 5\%$ 1/16W	R889	0150112	VR 2K OHM-B
R783	0700045	CF 2.2K OHM $\pm 5\%$ 1/16W	R890	0100041	CF 100 OHM $\pm 5\%$ 1/8W
R784	0700042	CF 1.2K OHM $\pm 5\%$ 1/16W	R891	0100041	CF 100 OHM $\pm 5\%$ 1/8W
R801	0100077	CF 3.3K OHM $\pm 5\%$ 1/8W	R892	0100061	CF 680 OHM $\pm 5\%$ 1/8W
R802	0100089	CF 10K OHM $\pm 5\%$ 1/8W	R893	0150112	VR 2K OHM-B
R803	0100073	CF 2.2K OHM $\pm 5\%$ 1/8W	R894	0150109	VR 200 OHM-B RS-6
R804	0100089	CF 10K OHM $\pm 5\%$ 1/8W	R895	0100041	CF 100 OHM $\pm 5\%$ 1/8W
R805	0100061	CF 680 OHM $\pm 5\%$ 1/8W	R901A	0113731	CF 180 OHM $\pm 5\%$ 1/4W
R806	0100089	CF 10K OHM $\pm 5\%$ 1/8W	R902	0141154	WW 2.2 OHM $\pm 10\%$ 15W

PRODUCT SAFETY NOTE: Components marked with a Δ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	DESCRIPTION	SYMBOL NO.	PART NO.	DESCRIPTION
Δ R903	0119647	MF 47K OHM $\pm 1\%$ 1/8W	R963	0147068	WW 68 OHM $\pm 5\%$ 2W
R904	0110221	MF 100 OHM $\pm 5\%$ 2W	R964	0100133	CF 680K OHM $\pm 5\%$ 1/8W
R905	0110253	MF 2.2K OHM $\pm 5\%$ 2W	ICs		
Δ R906	01195121	FR 1 OHM $\pm 5\%$ 1/4W			
Δ R907	0119508	FR 56 OHM $\pm 5\%$ 1/4W			
R908	0119688	MF 0.22 OHM $\pm 5\%$ 1W	IC0101	2001225	IC MN1872012AHHB-5 (MICON)
R909	0700054	CF 10K OHM $\pm 5\%$ 1/16W	IC0102	2381111	IC M6M80021L
R910	0194068	WW 1 OHM $\pm 5\%$ 2W	IC0103	2380391	IC UPD6326C
Δ R911	0700054	CF 10K OHM $\pm 5\%$ 1/16W	IC0401	2000261	IC UPC1871CU
R912A	0140316	MF 33K OHM $\pm 2\%$ 1W	IC0501	2917611	IC LA7016
Δ R913	0119633	MF 12K OHM $\pm 1\%$ 1/8W	IC0502	2917611	IC LA7016
Δ R913A	0140316	MF 33K OHM $\pm 2\%$ 1W	IC0503	2380391	IC UPD6326C
R914	0110273	MF 15K OHM $\pm 5\%$ 2W	IC3001	2916671	IC LA7955
R915	0700031	CF 180 OHM $\pm 5\%$ 1/16W	IC3002	2383341	IC LVA522S-2
Δ R916	0119617	MF 2.7K OHM $\pm 10\%$ 1/8W	IC3003	2383341	IC LVA522S-2
Δ R917	0119617	MF 2.7K OHM $\pm 10\%$ 1/8W	IC301	2381832	IC HA1159NT
R918	0700043	CF 1.5K OHM $\pm 5\%$ 1/16W	Δ IC401	2912561	IC LA4270
R919	0700067	CF 100K OHM $\pm 5\%$ 1/16W	IC4101	2366392	IC AN5836
R920	0100133	CF 680K OHM $\pm 5\%$ 1/8W	Δ IC501	2916633	IC HA11511CNT
R921	0187104	CF 43K OHM $\pm 5\%$ 1/16W	IC502	2000391	IC HA11561
R922	0700054	CF 10K OHM $\pm 5\%$ 1/16W	Δ IC601	2917361	IC UPC1498H
R923	0100047	CF 180 OHM $\pm 5\%$ 1/8W	IC651	2362605	IC BA4558
R924	0700045	CF 2.2K OHM $\pm 5\%$ 1/16W	Δ IC701	2913891	IC TLP631
R925	0700055	CF 12K OHM $\pm 5\%$ 1/16W	IC702	2366701	IC UPC7812H
R926	0700041	CF 1K OHM $\pm 5\%$ 1/16W	Δ IC901	2366721	IC UPC1394C
R927	0700057	CF 18K OHM $\pm 5\%$ 1/16W	TRANSISTORS		
Δ R928	0119649	MF 56K OHM $\pm 1\%$ 1/8W			
Δ R929	0150301	VR 1K OHM-B	Q0101	2320598	TR 2SC458B/C/D
Δ R930	0119616	MF 2.4K OHM $\pm 1\%$ 1/8W	Q0102	2320637	TR 2SA673C/D
Δ R931	0187050	CF 240 OHM $\pm 5\%$ 1/16W	Q0103	2320598	TR 2SC458B/C/D
R932	0700045	CF 2.2K OHM $\pm 5\%$ 1/16W	Q0104	2320598	TR 2SC458B/C/D
R933	0700053	CF 8.2K OHM $\pm 5\%$ 1/16W	Q0105	2320598	TR 2SC458B/C/D
R935	0119617	MF 2.7K OHM $\pm 10\%$ 1/8W	Q0106	2320598	TR 2SC458B/C/D
R937	0113791	CF 47K OHM $\pm 5\%$ 1/2W	Q0109	2320643	TR 2SC1213C
R938	0700035	CF 390 OHM $\pm 5\%$ 1/16W	Q0111	2320598	TR 2SC458B/C/D
R940	0700041	CF 1K OHM $\pm 5\%$ 1/16W	Q0112	2320598	TR 2SC458B/C/D
R941	0113766	CF 4.7K OHM $\pm 5\%$ 1/2W	Q0201	2320598	TR 2SC458B/C/D
R942	0110279	MF 27K OHM $\pm 5\%$ 2W	Q0401	2320598	TR 2SC458B/C/D
R942A	0110277	MF 22K OHM $\pm 5\%$ 2W	Q0402	2320598	TR 2SC458B/C/D
R943	0113803	CF 150K OHM $\pm 5\%$ 1/2W	Q0501	2323434	TR 2SC1983O/Y
R944	0700055	CF 12K OHM $\pm 5\%$ 1/16W	Q0502	2320643	TR 2SC1213C
R945	0700056	CF 15K OHM $\pm 5\%$ 1/16W	Q101	2323521	TR 2SD789 B/C/D/E
R946	0114215	CF 39K OHM $\pm 5\%$ 1/4W	Q151	2323521	TR 2SD789 B/C/D/E
R947	0100117	CF 150K OHM $\pm 5\%$ 1/8W	Q3001	2320647	TR 2SC1213C/D
R948	0700054	CF 10K OHM $\pm 5\%$ 1/16W	Q3002	2320598	TR 2SC458B/C/D
R949	0700054	CF 10K OHM $\pm 5\%$ 1/16W	Q3003	2320598	TR 2SC458B/C/D
Δ R953	0119514	FR 10 OHM $\pm 5\%$ 1/4W	Q3004	2321351	TR 2SA836/844 D/E
R954	0700064	CF 56K OHM $\pm 5\%$ 1/16W	Q3005	2320598	TR 2SC458B/C/D
R955	0700067	CF 100K OHM $\pm 5\%$ 1/16W	Q3006	2320598	TR 2SC458B/C/D
R956	0700061	CF 33K OHM $\pm 5\%$ 1/16W	Q3007	2320596	TR 2SC458C/D
R957	0100111	CF 82K OHM $\pm 5\%$ 1/8W	Q3008	2320596	TR 2SC458C/D
R958	0700049	CF 4.7K OHM $\pm 5\%$ 1/16W	Q3009	2320598	TR 2SC458B/C/D
R959	0100065	CF 1K OHM $\pm 5\%$ 1/8W			

PRODUCT SAFETY NOTE: Components marked with a Δ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	DESCRIPTION	SYMBOL NO.	PART NO.	DESCRIPTION
Q301	2321351	TR 2SA836/844 D/E	Q903	2321111	TR 2SA778A K
Q3011	2320596	TR 2SC458C/D	Q904	2320596	TR 2SC458C/D
Q302	2320598	TR 2SC458B/C/D	Δ Q905	2326631	THYRISTOR CR5AS-8
Q303	2320598	TR 2SC458B/C/D	Q906	2320596	TR 2SC458C/D
Q304	2320598	TR 2SC458B/C/D	Q907	2320637	TR 2SA673C/D
Q305	2320637	TR 2SA673C/D	Q950	2323522	TR 2SD789 E
Q306	2320598	TR 2SC458B/C/D	Q951	2323522	TR 2SD789 E
Q308	2320598	TR 2SC458B/C/D	Q952	2314391	TR 2SC3708 R/S
Q4003	2320598	TR 2SC458B/C/D	Q953	2314381	TR 2SA1450 R/S
Q4004	2320598	TR 2SC458B/C/D	DIODES		
Q402	2320598	TR 2SC458B/C/D			
Q4051	2320598	TR 2SC458B/C/D	D0102	23383211	DI 1SS270
Q4052	2320598	TR 2SC458B/C/D	D0109	23383211	DI 1SS270
Q4053	2320598	TR 2SC458B/C/D	D0110	23383211	DI 1SS270
Q4054	2320598	TR 2SC458B/C/D	D0112	23383211	DI 1SS270
Q4055	2320598	TR 2SC458B/C/D	D0115	23383211	DI 1SS270
Q4056	2320598	TR 2SC458B/C/D	D0116	23383211	DI 1SS270
Q4101	2320643	TR 2SC1213C	D0117	23383211	DI 1SS270
Q4102	2320596	TR 2SC458C/D	D0118	23383211	DI 1SS270
Q4103	2320596	TR 2SC458C/D	D0119	23383211	DI 1SS270
Q501	2320598	TR 2SC458B/C/D	D0124	23383211	DI 1SS270
Q502	2320598	TR 2SC458B/C/D	D0125	23383211	DI 1SS270
Q601	2320598	TR 2SC458B/C/D	D0126	23383211	DI 1SS270
Q602	2321351	TR 2SA836/844 D/E	D0127	23383211	DI 1SS270
Q651	2320598	TR 2SC458B/C/D	D0128	23383211	DI 1SS270
Q701	2326216	TR 2SC3116 S/T	D0129	23383211	DI 1SS270
Δ Q702	2327844	TR 2SD1959-02	D0130	23383211	DI 1SS270
Δ Q703	2320637	TR 2SA673C/D	D0131	23383211	DI 1SS270
Q706	2323434	TR 2SC1983 O/Y	D0132	23383211	DI 1SS270
Δ Q708	2320596	TR 2SC458C/D	D0133	23383211	DI 1SS270
Q750	2320596	TR 2SC458C/D	D0134	23383211	DI 1SS270
Q751	2320637	TR 2SA673C/D	D0136	23383211	DI 1SS270
Q752	2323434	TR 2SC1983 O/Y	D0137	23383211	DI 1SS270
Q770	2320596	TR 2SC458C/D	D0138	23383211	DI 1SS270
Q771	2321351	TR 2SA836/844 D/E	D0139	23383211	DI 1SS270
Q772	2320596	TR 2SC458C/D	D0401	2334672	LED SLC-26
Q851	2320591	TR 2SC458B/C	D0402	2334671	LED SLC26UR14
Q852	2320591	TR 2SC458B/C	D0403	23383211	DI 1SS270
Q853	2320591	TR 2SC458B/C	D0404	23383211	DI 1SS270
Q854	2312371	TR 2SC3942	D301	23383211	DI 1SS270
Q855	2312371	TR 2SC3942	D302	23383211	DI 1SS270
Q856	2312371	TR 2SC3942	D303	23383211	DI 1SS270
Q857	2312371	TR 2SC3942	D304	23383211	DI 1SS270
Q858	2312371	TR 2SC3942	D305	23383211	DI 1SS270
Q859	2312371	TR 2SC3942	D306	23383211	DI 1SS270
Q860	2312772	TR 2SA1546M/L	D310	23383211	DI 1SS270
Q861	2312371	TR 2SA1546M/L	D311	23383211	DI 1SS270
Q862	2312371	TR 2SA1546M/L	D312	23383211	DI 1SS270
Q863	2320591	TR 2SC458B/C	D313	23383211	DI 1SS270
Q864	2320637	TR 2SA673C/D	D314	23383211	DI 1SS270
Q865	2320637	TR 2SA673C/D	D315	23383211	DI 1SS270
Δ Q901	2328455	TR FN651	D316	23383211	DI 1SS270
Q902	2324322	TR 2SC2271/2SC2610-05			

PRODUCT SAFETY NOTE: Components marked with a Δ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	DESCRIPTION	SYMBOL NO.	PART NO.	DESCRIPTION
D401	23383211	DI 1SS270	Δ D903	2335982	DI RM11A
D402	23383211	DI 1SS270	D905	2336612	DI RU3AM
D4101	23383211	DI 1SS270	Δ D906	2336612	DI RU3AM
D501	23383211	DI 1SS270	D907	23394911	DI AM01Z
D502	23383211	DI 1SS270	D908	23383211	DI 1SS270
D503	23383211	DI 1SS270	D950	23394911	DI AM01Z
D504	23383211	DI 1SS270	D951	23394911	DI AM01Z
D601	23394911	DI AM01Z	D952	23394911	DI AM01Z
D602	23383211	DI 1SS270	D953	23394911	DI AM01Z
D603	23383211	DI 1SS270	D954	23394911	DI AM01Z
D605	23383211	DI 1SS270	D955	23394911	DI AM01Z
D606	2330352	DI 1S2076A	D957	23394911	DI AM01Z
D701	23394911	DI AM01Z	D958	23394911	DI AM01Z
D702	23394911	DI AM01Z	D971	23383211	DI 1SS270
D703	2348511	DI RS3FS	ZD0101	2334122	ZD RD5.1EB1
D704	23389311	DI FMG-G26S	ZD0102	2331834	ZD HZ-11 B1
D706	2338902	DI DFM1SA4	ZD0103	2339839	ZD HZS5C3
D707	2336612	DI RU3AM	ZD0104	2335991	ZD HZT-33
Δ D709	23394811	DI AS01Z	ZD0105	2331155	ZD HZ12 (C1/C2/C3)
D710	2338902	DI DFM1SA4	ZD0106	2339885	ZD HZS12B2
D711	23383211	DI 1SS270	ZD0501	2339021	ZD HZS6B1L
D713	23394911	DI AM01Z	ZD0502	2331155	ZD HZ-12 (C1/C2/C3)
D714	23373411	DI 1SS270A	ZD0503	2331155	ZD HZ-12 (C1/C2/C3)
D715	23373411	DI 1SS270A	ZD0504	2331155	ZD HZ-12 (C1/C2/C3)
D716	23383211	DI 1SS270	ZD0505	2331155	ZD HZ-12 (C1/C2/C3)
D717	23394911	DI AM01Z	ZD0506	2331155	ZD HZ-12 (C1/C2/C3)
D718	23383211	DI 1SS270	ZD0507	2331155	ZD HZ-12 (C1/C2/C3)
D719	2339481	DI AS01Z	ZD0508	2331155	ZD HZ-12 (C1/C2/C3)
D770	23383211	DI 1SS270	ZD0509	2331155	ZD HZ-12 (C1/C2/C3)
D857	23383211	DI 1SS270	ZD0510	2331155	ZD HZ-12 (C1/C2/C3)
D858	23383211	DI 1SS270	ZD0511	2331155	ZD HZ-12 (C1/C2/C3)
D859	23383211	DI 1SS270	ZD0513	2331155	ZD HZ-12 (C1/C2/C3)
D860	23383211	DI 1SS270	ZD0514	2331155	ZD HZ-12 (C1/C2/C3)
D861	23383211	DI 1SS270	ZD0515	2331155	ZD HZ-12 (C1/C2/C3)
D862	23383211	DI 1SS270	ZD0516	2331155	ZD HZ-12 (C1/C2/C3)
D863	23383211	DI 1SS270	ZD0517	2331155	ZD HZ-12 (C1/C2/C3)
D864	23383211	DI 1SS270	ZD0518	2331155	ZD HZ-12 (C1/C2/C3)
D865	23383211	DI 1SS270	ZD0519	2331155	ZD HZ-12 (C1/C2/C3)
D866	2331913	DI 1SS83	ZD0520	2331155	ZD HZ-12 (C1/C2/C3)
D867	2331913	DI 1SS83	ZD101	2331835	ZD HZ-11 B1
D868	2331913	DI 1SS83	ZD151	2331807	ZD HZ6 (C1)
D869	2331913	DI 1SS83	ZD301	2339868	ZD HZS9C2
D870	2331913	DI 1SS83	ZD305	23391411	ZD HZS12B1L
D871	2331913	DI 1SS83	ZD306	2331155	ZD HZ-12 (C1/C2/C3)
D872	23383211	DI 1SS270	ZD501	2339091	ZD HZS9C1L
D875	23383211	DI 1SS270	ZD502	2339091	ZD HZS9C1L
D876	23383211	DI 1SS270	ZD503	2339091	ZD HZS9C1L
D877	23383211	DI 1SS270	ZD601	2339191	ZD HZS20-1L
D878	23383211	DI 1SS270	ZD603	2339242	ZD HZS33-2L
D879	23383211	DI 1SS270	ZD604	2339242	ZD HZS33-2L
D880	23383211	DI 1SS270	ZD652	2339142	ZD HZS12L(B2)
D881	23383211	DI 1SS270	ZD701	2339091	ZD HZS9C1L
Δ D901	2335982	DI RM11A	ZD702	23390511	ZD HZS7B1L

PRODUCT SAFETY NOTE: Components marked with a Δ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	DESCRIPTION	SYMBOL NO.	PART NO.	DESCRIPTION
ZD706	2339152	ZD HZS12C2L	L0117	2123461	FERRITE BEADS CORE
Δ ZD707	2339242	ZD HZS33-2L	L0118	2122942	LA AXIAL COIL 8.2 MH $\pm 10\%$
Δ ZD708	2339242	ZD HZS33-2L	L0119	2122942	LA AXIAL COIL 8.2 MH $\pm 10\%$
ZD709	2331826	ZD HZ 9B3	L0120	2122942	LA AXIAL COIL 8.2 MH $\pm 10\%$
ZD712	2339051 1	ZD HZS7B1L	L0501	2120482	FILTER COIL 100 MH $\pm 10\%$
ZD713	2339251	ZD HZS36-1L	L0502	2122956	LA AXIAL COIL 100 MH $\pm 10\%$
ZD714	2339814	ZD HZS3B1	L0503	2122956	LA AXIAL COIL 100 MH $\pm 10\%$
ZD716	2339091	ZD HZS9C-1L	L0504	2122956	LA AXIAL COIL 100 MH $\pm 10\%$
ZD751	2339251	ZD HZS36-1L	L0505	2122956	LA AXIAL COIL 100 MH $\pm 10\%$
ZD851	2331781	ZD HZ4 (A1)	L3001	2122956	LA AXIAL COIL 100 MH $\pm 10\%$
ZD854	2339814	ZD HZS3B1	L3002	2122956	LA AXIAL COIL 100 MH $\pm 10\%$
ZD855	2339885	ZD HZS12B2	L3003	2122939	LA AXIAL COIL 5.6 MH
ZD856	2339885	ZD HZS12B2	L3005	2141148	1H DL COIL
ZD857	2339885	ZD HZS12B2	L3006	2165811	B.P.FILTER SBP4370
ZD901	2339152	ZD HZS12C2L	L3007	2122956	LA AXIAL COIL 100 MH $\pm 10\%$
Δ ZD902	2339251	ZD HZS36-1L	L301	2122956	LA AXIAL COIL 100 MH $\pm 10\%$
Δ ZD903	2339031	ZD HZS6C1L	L302	2122956	LA AXIAL COIL 100 MH $\pm 10\%$
ZD904	2339251	ZD HZS36-1L	L304	2166121	TRAP COIL 3.58 MHz
ZD951	2339021	ZD HZS6B1L	L305	2122956	LA AXIAL COIL 100 MH $\pm 10\%$
ZD952	2339093	ZD HZS9C3L	L306	2122932	LAL AXIAL COIL
			L306A	2122956	LA AXIAL COIL 100 MH $\pm 10\%$
			L307	2122653	FERRITE CORE
			L311	2122969	LA AXIAL COIL 1 MH
TRANSFORMERS			L4101	2122956	LA AXIAL COIL 100 MH $\pm 10\%$
Δ T701	2274351	H.DRIVE TRANSFORMER	L504	2122953	LA AXIAL COIL 56 MH
Δ T702	2435376	FLYBACK TRANSFORMER C87LLI	L702	2165403	H. LINEARITY COIL
Δ T901	2215402	POWER TRANSFORMER	Δ L704	2124181	CHOKE COIL
T902	2260021	HORIZONTAL DRIVE COIL	L705	2120488	FILTER COIL
Δ T950	2215381	POWER TRANSFORMER	L706	2122211	FILTER COIL 12 MH $\pm 10\%$
			L709	2122099	FILTER COIL 18 MH
FUSES			L713	2125215	FILTER COIL
Δ F901	2721053	FUSE 5A	L770	2123116	LAL AXIAL COIL 100 MH $\pm 10\%$
Δ F902	2721704	FUSE 2A	L851	2122945	LA AXIAL COIL 15 MH $\pm 10\%$
			L852	2122945	LA AXIAL COIL 15 MH $\pm 10\%$
COMPOUND COMPONENTS			L853	2122945	LA AXIAL COIL 15 MH $\pm 10\%$
Δ CP901	2790292	CAPRISTOR	L854	2122956	LA AXIAL COIL 100 MH $\pm 10\%$
Δ CP903	2790292	CAPRISTOR	L855	2122956	LA AXIAL COIL 100 MH $\pm 10\%$
MF0101	2163972	CERAMIC FILTER 6MHZ	L856	2122956	LA AXIAL COIL 100 MH $\pm 10\%$
MF301	2163971	CERAMIC FILTER	L857	2122244	LA AXIAL COIL 22 MH
MF701	2786683	CERAMIC OSCILLATOR	L858	2122244	LA AXIAL COIL 22 MH
			L859	2122244	LA AXIAL COIL 22 MH
			L860	2122253	LA AXIAL COIL 100 MH
COILS			L861	2122653	FERRITE CORE
L0102	2122956	LA AXIAL COIL 100 MH $\pm 10\%$	Δ L901	2272293	LINE FILTER LL (T)
L0103	2122253	LA AXIAL COIL 100 MH	Δ L902	2121674	LINE FILTER COIL
L0106	2791754	DSS306-55B101M	L903	2124362	DC NOISE FILTER 2
L0108	2791754	DSS306-55B101M	Δ L904	2125481	HIGH FREQUENCY COIL
L0109	2791754	DSS306-55B101M	L905	2165743	DEGAUSSING COIL
L0110	2791754	DSS306-55B101M	L907	2123461	FERRITE BEADS CORE
L0111	2791754	DSS306-55B101M	L908	2122653	FERRITE CORE
L0112	2122956	LA AXIAL COIL 100 MH $\pm 10\%$	L909	2122653	FERRITE CORE
L0116	2123461	FERRITE BEADS CORE	L910	2122653	FERRITE CORE

PRODUCT SAFETY NOTE: Components marked with a Δ have special characteristics important to safety. Before replacing any of these components, read carefully, the PRODUCT SAFETY NOTICE of this Service Manual. Don't degrade the safety of the receiver through improper servicing.

SYMBOL NO.	PART NO.	DESCRIPTION	SYMBOL NO.	PART NO.	DESCRIPTION
SWITCHES			M	2665272	4P PLUG PIN WITH BASE
			PX	2661752	PLUG PIN
			V	2661752	PLUG PIN
S0101	2632923	5 TACT SWITCH	W	2661753	PIN PLUG WITH BASE
S0102	2633171	5 KEY TACT SWITCH 5P	Z	2663821	2P PLUG PIN
S0103	2633171	5 KEY TACT SWITCH 5P	Δ E001	2983103	9P PIN JACK WITH SWITCH
S0104	2633175	PUSH SWITCH	Δ E002	2673002	2P PIN JACK
COLOR PICTURE TUBE			Δ E003	2983121	SOCKET WITH SWITCH
Δ V1	2470283	CPT M68JUA 98X or M68JUA20X (MCPA)	Δ E1	2972521	POWER SUPPLY CORD
			Δ E201	2982471	300-75 VHF ADAPTER
			Δ E301	2573344	REMOTE CONTROL TRANSMITTER CLU-611PR (HCPA)
MISCELLANEOUS			Δ E601	2444251	DEFLECTION YOKE
Δ	3811813	VR-DOOR B (HCPA)	E603	2772211	MAGNET PIECE on CPT.
Δ	3122633	CABINET ASS'Y (HCPA)	E603A	2772211	MAGNET PIECE on CPT.
	3470371	BACK COVER ASS'Y (HCPA)	E604	2773671	CF MAGNET
	3727972	HOLDER-AC LINE CORD	E801	2953102	CPT SOCKET
	3739671	CORD HOLDER	E952	3772201	AC CORD HOLDER
	3785043	PUSH LOCK A	Δ RL901	2641221	POWER RELAY
	3142271	SPEAKER GRILLE ASS'Y R (HCPA)	SG851	2340037	SPARK GAP
	3142261	SPEAKER GRILLE ASS'Y L (HCPA)	Δ SP451	2412645	SPEAKER (HCPA)
	3823755	ANTENNA LABEL	Δ SP452	2412645	SPEAKER (HCPA)
	2784342	CONDENSER COVER (C748, C901, C911)	Δ SP453	2410794	SPEAKER (HCPA)
			Δ SP454	2410794	SPEAKER (HCPA)
	2771891	FERRITE BEADS CORE 003 (C0103, C0104)	TH651	2340371	THERMISTOR 112301-9
	2771892	FERRITE BEADS CORE 004 (C969, D719, D905, D906, Q702, Q851~Q856, Q901)	TH751	2340552	THERMISTOR
			Δ TH901	2340812	POSISTOR
	4520883	M3X12 SCREW WITH WASHER (IC401)	U0101	2381122	REMOTE CONTROL RECEIVER
	4520881	M3X8 SCREW WITH WASHER (IC702, Q706, Q752)	U0501	2575391	SPS-409-1Y
	8821234	3 NUT (Q702)	Δ U101	2429341	PIN P UNIT
	8813124	WASHER (Q702)	X501	2791501	FRONTEND V8-A58FT
	2771893	FERRITE BEADS CORE (Q702)			CRYSTAL HC-49/U
	8821114	NUT 3 (Q901, T901)			
	8813124	WASHER (Q901)			
	4159411	3X8 KNURL TAPPING SCREW (Q901)			
	8811114	3 SPRING WASHER (Q901)			
	4514065	3X16 ZANE (T901)			
	3731081	PURSE LOCK 10			
	2788841	ANODE CLAMP			
	3763751	SK BINDER			
	3794331	PRESET DRIVER			
	4615641	WEDGE			
	3330941	EARTH SPRING			
DL3001	2791101	DELAY LINE			
DL3002	2794201	DELAY LINE			
Δ EANT	2427364	ANTENNA SWITCH ASS'Y ASB-311-			
Δ EF901	2720221	FUSE HOLDER			



HITACHI SALES CORPORATION OF AMERICA

NATIONAL HEADQUARTERS OFFICE: 401 West Artesia Blvd., Compton Calif. 90220 Tel. 213-537-8383

Western Regional Office:	401 West Artesia Blvd., Compton Calif. 90220	Tel. 213-537-8383
Eastern Regional Office:	1200 Wall St. West, Lyndhurst, N.J. 07071	Tel. 201-935-8980
Mid-Western Regional Office:	1400 Morse Ave., Elk Grove Village, Illinois 60007	Tel. 312-593-1550
Southern Regional Office:	510 Plaza Dr., College Park, Georgia 30349	Tel. 404-763-0360

HITACHI SALES CORPORATION OF HAWAII, INC.

3219 Koapaka Street Honolulu, Hawaii 96819 Tel. 836-3621

HITACHI SALES CORPORATION DE PANAMA, S.A.

Apartado 7657, Panamá 5, Panamá City, Rep. of Panamá. Tel. 61-3100
